


## INSTALLATION GUIDE

# eGrabber

### Installing Frame Grabbers

Product	Groups	KC registration
28768   PC1633-T Coaxlink Quad G3	CE_B1, FCC_B, PCI_3x4, 25W	MSIP-REM-EUr-PC1633
28776   PC3602-T Coaxlink Octo	CE_A1, FCC_A, PCI_3x8, 25W	R-R-EUr-PC3602
28781   PC3621-LH-T Coaxlink Mono CXP-12-LH	CE_B1, FCC_B, PCI_3x4, 25W, LP	R-R-EUr-PC3622
28782   PC3622-T Coaxlink Duo CXP-12	CE_B1, FCC_B, PCI_3x4, 25W, LP	R-R-EUr-PC3622
28783   PC3623-T Coaxlink Quad CXP-12 Value	CE_B2, FCC_B, PCI_3x8, 25W	R-R-EUr-PC3623

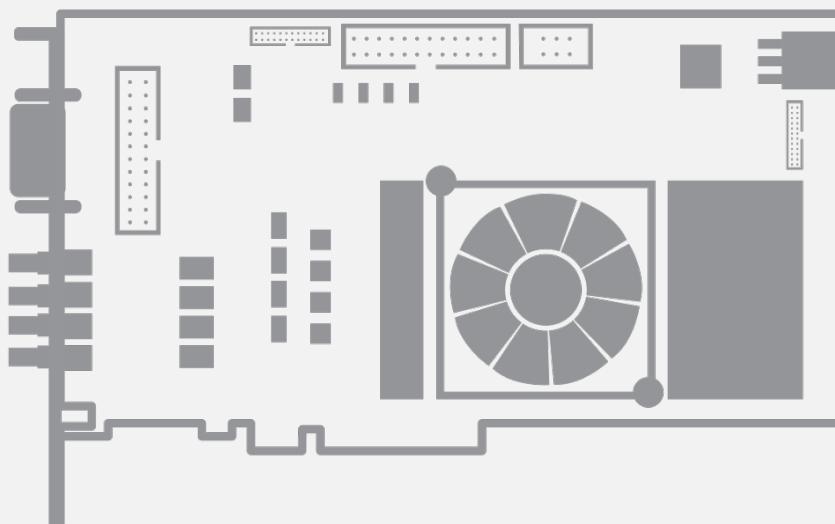

# Contact us

## Website, email

### General

[www.alliedvision.com/en/contact](http://www.alliedvision.com/en/contact)

[info@alliedvision.com](mailto:info@alliedvision.com)

### Distribution partners

[www.alliedvision.com/en/avt-locations/avt-distributors](http://www.alliedvision.com/en/avt-locations/avt-distributors)

### Support

[www.alliedvision.com/en/support](http://www.alliedvision.com/en/support)

[www.alliedvision.com/en/about-us/contact-us/technical-support-repair-/rma](http://www.alliedvision.com/en/about-us/contact-us/technical-support-repair-/rma)

## Offices

### Europe, Middle East, and Africa (Headquarters)

Allied Vision Technologies GmbH

Taschenweg 2a

07646 Stadtroda, Germany

T// +49 36428 677-0 (Reception)

T// +49 36428 677-230 (Sales)

F// +49 36428 677-28

### Asia-Pacific | China

Allied Vision Technologies Shanghai Co Ltd.

B-510, Venture International Business Park

2679 Hechuan Road

Minhang District, Shanghai 201103

People's Republic of China

T// +86 21 64861133

### Singapore

Allied Vision Technologies Asia Pte. Ltd

82 Playfair Rd, #07-01 D'Lithium

Singapore 368001

T// +65 6634 9027

### North, Central, and South America, Canada

Allied Vision Technologies Canada Inc.

300 – 4621 Canada Way

Burnaby, BC V5G 4X8, Canada

T// +1 604 875 8855

### USA

Allied Vision Technologies, Inc.

102 Pickering Way - Suite 502

Exton, PA 19341, USA

Toll-free// +1-877-USA-1394

T// +1 978 225 2030

### Japan

Allied Vision Technologies

Yokohama Portside Bldg. 10F

8-1 Sakae-cho, Kanagawa-ku

Yokohama-shi, Kanagawa, 221-0052

T// +81 (0) 45 577 9527

This documentation is provided with **eGrabber 25.07.1** (doc build 2202).

<https://www.alliedvision.com>

This documentation is subject to the General Terms and Conditions stated on the website of **Allied Vision Technologies GmbH** and available on <https://www.alliedvision.com/en/information/terms-conditions/>.

# 1. Declarations

## CE/UKCA compliance



### Notice for Europe

All products are in conformity with the Council Directive 2014/30/EU



### Notice for Great Britain

All products are in conformity with Electromagnetic Compatibility Regulations 2016

- Products belonging to the **CE\_A1** group have been tested and found to comply with:
  - Class A EN 55022 / CISPR 22 or EN 55032 / CISPR 32 electromagnetic emission requirements for information technology equipment
  - EN 55024 / CISPR 24 or EN 55035 / CISPR 35 electromagnetic immunity requirements for information technology equipment
- Products belonging to the **CE\_B1** group have been tested and found to comply with:
  - Class B EN 55022 / CISPR 22 or EN 55032 / CISPR 32 electromagnetic emission requirements for information technology equipment
  - EN 55024 / CISPR 24 or EN 55035 / CISPR 35 electromagnetic immunity requirements for information technology equipment
- Products belonging to the **CE\_B2** group have been tested and found to comply with:
  - EN 61000-6-2 Immunity standard for industrial environments

### NOTE

To meet these requirements, shielded cables must be used to connect a peripheral to the card.

## FCC compliance



### Notice for USA

Compliance Information Statement (Declaration of Conformity Procedure) DoC FCC  
Part 15

- Products belonging to the **FCC\_A** group have been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. The Class A limits are designed to provide reasonable protection against harmful interference in an industrial environment.
- Products belonging to the **FCC\_B** group have been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. The Class B limits are designed to provide reasonable protection against harmful interference in a residential installation or when the equipment is operated in a commercial environment.

### NOTE

Products belonging to the **FCC\_\*** groups generate, use and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If any of these equipments does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## KC compliance



### Notice for Korea

Products having a **KC registration number** are registered under the Clause 3, Article 58-2 of Radio Waves Act.

## Camera interface compliance



Coaxlink products comply with *CoaXPress Standard 1.0, 1.1, 1.1.1, 2.0 and 2.1*.

Products belonging to the **CoF** group comply with *CoaXPress-over-Fiber Bridge Protocol 1.1*.

## Environmental compliance



**All products** are in conformity with the European Union 2015/863 (ROHS3) Directive, that stands for "the restriction of the use of certain hazardous substances in electrical and electronic equipment".



**All products** are in conformity with the European Union 1907/2006 (REACH) regulation.



According the European directive 2012/19/EU, **all products** must be disposed of separately from normal household waste. It must be recycled according to the local regulations.

## 2. Precautions for Use of Board Products

*Electrostatic Sensitive Device* Boards may be damaged by electrostatic discharges. Follow the procedure hereby described and apply any general procedure aimed at reducing the risk associated with electrostatic discharge. Damage caused by improper handling is not covered by the manufacturer's warranty.

*Electromagnetic Compatibility* AVT boards are compliant with electromagnetic compatibility regulatory requirements. To ensure this compliance, the card bracket must be secured with the relevant screw in accordance with the procedure described herein.

*Risk of Electrical Shock* Do not operate the computer with any enclosure cover removed. During the hardware installation, ensure the AC power cord is unplugged before touching any internal part of the computer.

*Risk of Burn* Do not touch an operating board. Allow board to cool before handling.

*Heating Device* It is normal for a board to dissipate some heat during operation. All enclosure covers, including blank brackets, must be fitted correctly to ensure that the fan cools the computer adequately.

*Hot Plugging Forbidden* Uncontrolled plugging and unplugging of equipment may damage a board. Always switch off the computer and any relevant system device when connecting or disconnecting a cable at the frame grabber or auxiliary board bracket. Failure to do so may damage the card and will void the warranty.

*Poor Grounding Protection* The computer and the camera can be located in distant areas with individual ground connections. Poor ground interconnection, ground loop or ground fault may induce unwanted voltage between equipment, causing excessive current in the interconnecting cables. This faulty situation can damage the frame grabber or the camera electrical interface. The user must follow proper equipment grounding practices at all ends of the interconnecting cables. In addition, the use of cable assemblies with overall shield solidly connected to the conductive shell of all connectors is recommended. Besides the beneficial effect of cable shielding on electromagnetic compatibility, the shield connection can increase the protection level against grounding problems by temporarily absorbing unwanted fault current.

## 3. PCI Express Card Slot Requirements

### Data transfer performance

- Products belonging to the **PCI\_3x4** group must be plugged into a x4, x8 or x16 PCI Express Gen 3 card connector providing at least four active lanes.
- Products belonging to the **PCI\_3x8** group must be plugged into a x8 or x16 PCI Express Gen 3 card connector providing at least eight active lanes.

### Powering capability

- Products belonging to the **25W** group must be plugged into a 25 W PCI Express slot

### Cooling

To guarantee reliable operation across the entire operating temperature range and longer lifetime, ensure an adequate cooling of the card:

- The cooling is improved by a higher air flow circulating around the board. This air flow is increased, for example, by using computer case fans.
- Avoid placing a card next to other heat dissipating boards.

Fan-less products require a minimum air flow across the surface of the board. **PC3621-LH-T Coaxlink Mono CXP-12-LH** requires a minimum of 150 LFM (Linear Feet per Minute).

## 4. Low-Profile Bracket Installation

Products belonging to the **LP** group can also be installed in a low-profile computer. Therefore:

1. Remove the original standard-profile bracket by unscrewing the screw locks
2. Install the low-profile bracket and secure it on the board with the screw locks

## 5. PCI Express Card Installation Procedure

1. Switch off the computer and all connected peripherals (monitor, printer...).
2. Discharge any static electricity that could be accumulated by your body. You can achieve this by touching an unpainted metal part of the enclosure of your computer with a bare hand. Make sure that the computer is linked to the AC power outlet with proper earth connection.
3. Disconnect all cables from your computer, including AC power.
4. Open the computer enclosure, according to the manufacturer instructions, to gain access to the PCI Express slots. Locate an available and adequate PCI Express slot.
5. Remove the blank bracket associated with this location. To achieve this, remove the securing screw and keep it aside for later use in the procedure. Keep the blank bracket in a known place for possible re-use.
6. Unwrap the card packing, take the board and carefully hold it. Avoid any contact of the board with unnecessary items, including your clothes.
7. Gently insert the card into the selected PCIe slot, taking care to push it down fully into the slot. If you experience some resistance, remove the board and repeat the operation. You should attempt to make a perfect board-to-slot mechanical alignment for best results. Ensure that the lower part of the bracket is inserted into the corresponding enclosure fastening.
8. Secure the board with the saved screw.
9. **Optional.** When the camera(s) is (are) powered through the camera cable (PoCXP or PoCL) or when the +12 V power output is required on any System I/O connector, connect a 12 V power source to the Auxiliary Power Input connector using an 8-pin PEG cable terminated with a 2x3 plug + 2x1 plug (mandatory when total AUX power exceeds 75 W) or a 6-pin cable.
10. **Optional.** Establish the connections with the Internal GPIO connector(s) as required by the application.
11. **Optional.** When synchronized acquisition is required for cameras attached to different cards, establish the card-to-card link interconnections.
12. Close the computer enclosure according to the manufacturer instructions.

## 6. Software Setup Procedure

Prior to use the board, it is necessary to install the driver and update or install the firmware.

- The **eGrabber** driver is available from the *Software Downloads* page of the *AVT website*:  
<https://www.alliedvision.com/en/support/software-downloads/>
- Detailed instructions for driver installation and firmware update are available in the *PART I: Getting Started > Software Setup* section of the [D231ET Frame Grabbers Handbook](#) PDF document.