FXO CoaXPress

fxo540CCX



□□

□□	fxo540CCX
□□□□	F002085
□□□□	FXO CoaXPress
□□	Available

□□□

□□□□□	Area scan
□□	Color
□□	Visible
□□□□	400 nm to 1000 nm
□□□	5,312 × 4,600 (24.40 MP)
□□□□□	Sony IMX540
□□□□□□□□□	cmos
□□□□	Global shutter (GS)
□□□□□	14.55 × 12.6 mm (19.25 mm, Type 1.2)
□□□□	2.74 µm × 2.74 µm

□□□□

□□□□□□	8-bit, 12-bit
RGB□□□□	bayer8, bayer12

□□□□

□□□□	72 dB
□□□	39.6 dB

□□□□□

□□□□	30.4 fps
□□□□	21 µs to 60 s
□□	0.0 dB to 48.0 dB

I/O□□□

□□□□□IO	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
□□□□□□□IO	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
□□□□□□	1 x Optical isolated input, 0 x Optical isolated input,
I/O□□	12-pin Hirose HR10A-10P-12S
□□□□	10 to 25VDC, Power over CoaXPress
□□	External: 8 W (typical)

□□□□

□□□□□□□	-10 °C to 65 °C

□□□□

□□□□L x W x H mm□	70 × 50 × 50
□□□/□□□□	IR-Cut - 680nm
IP□□□□	IP30
□□□□	C-Mount
□□	240 g

□□□□FPGA

□□□□□□□□□□□	32 MByte

□□

□□□□	cxp-12 with 1 connection
□□□□□	(micro-BNC)
□□□□	CoaXPress 2.0

□□□□ - □□□□

□□□□	manual, auto, external
□□□□	auto, manual


□□□□ - □□□□

□□□□□	auto, manual
□□□□□□	roi, lut, mirror-image


□□□□ - □□□□


□□□□/□□	internal, software, external
□□□□□□	PoCxP, User Sets, PWM(4), Sequencer,


Quantum Efficiency

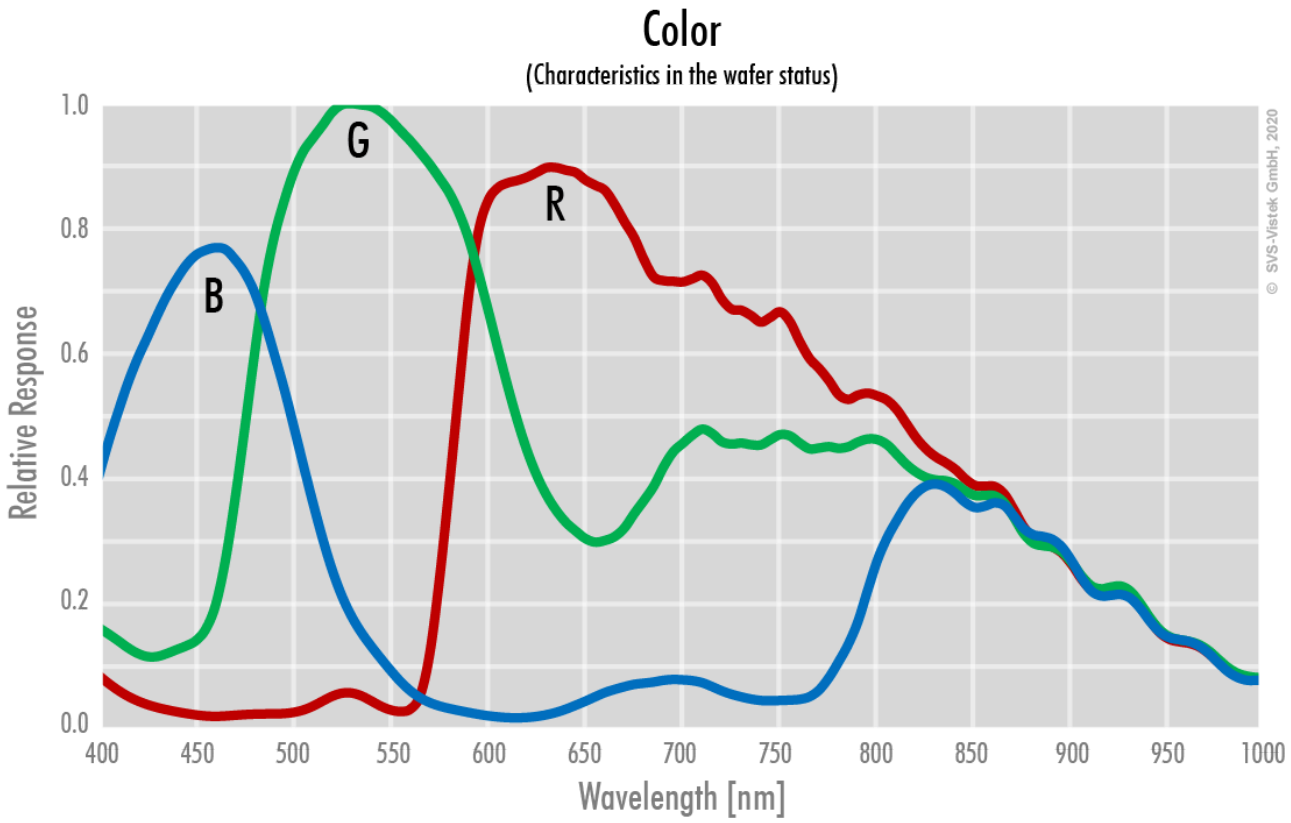



Technical Drawing

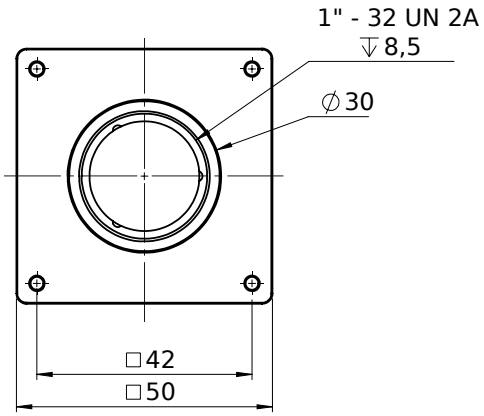


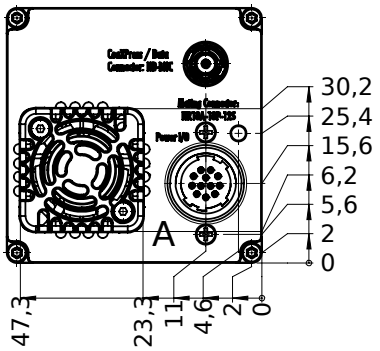


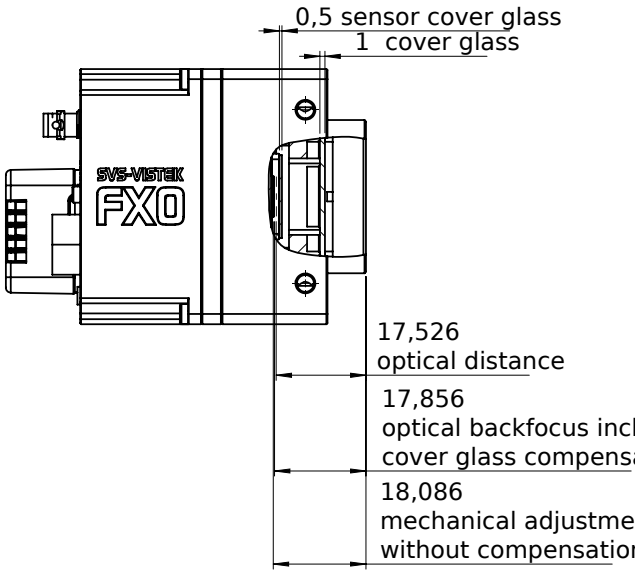

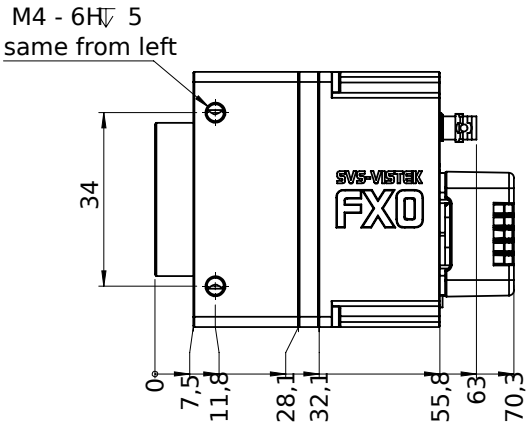

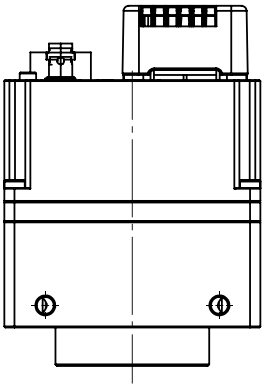


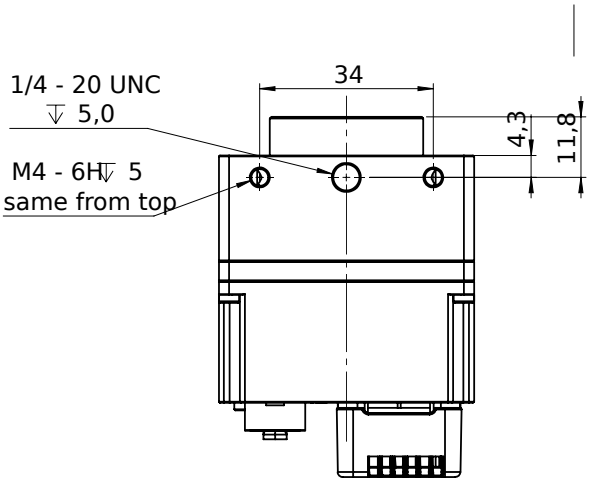

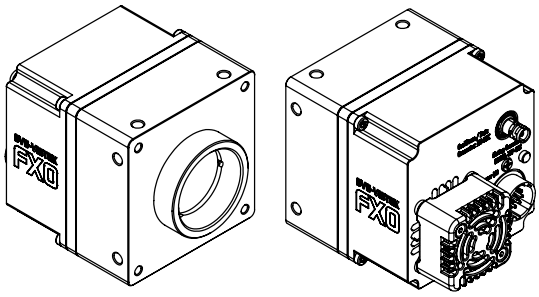

I/O pin assignment

Hirose 12 Pin



1	VIN –	(GND)	7	OUT 1	(open drain)
2	VIN +	(10 V to 25 V DC)	8	OUT 2	(open drain)
3	IN 4	(RXD RS232)	9	IN 3 +	(opto In +)
4	OUT 4	(TXD RS232)	10	IN 3 –	(opto In –)
5	IN 1	(0 - 24V)	11	OUT 3	(open drain)
6	IN 2	(0 - 24V)	12	OUT 0	(open drain)