

EoSens CoaXPress-12

EoSens9.5CCX12-FF

Preliminary product information. Features and technical specifications are subject to change without notice.

General

Model	EoSens9.5CCX12-FF
Product code	F006221
Product series	EoSens CoaXPress-12
Status	Prototype/engineering sample

Sensor

Sensor type	Area scan
Chroma	Color
Spectrum	Visible
Spectral range	380 nm to 1000 nm
Resolution	4,096 × 2,304 (9.50 MP)
Sensor model	Luxima LUX9506
Sensor architecture (material)	cmos
Shutter type(s)	global-shutter
Sensor size	26.62 × 14.98 mm (30.55 mm, 2)
Pixel size	6.50 μm × 6.50 μm

Pixel formats

Sensor bit depth	8-Bit, 10-Bit, 12-Bit
RGB pixel formats	bayer8, bayer10, bayer12

Timing and gain

Max. frame rate	503 fps
-----------------	---------

Timing and gain

Max. frame rate ROI modes	4096 x 2304 503 fps, 1920 x 1080 2243 fps, 1280 x 720 4898 fps, 640 x 480 13498 fps, 4096 x 100 11039 fps, 512 x 512 15767 fps, 512 x 8 225000 fps,
Exposure time	2 µs to 40.00 ms
Gain	0.0 dB to 12.0 dB

I/Os and power

Non-isolated lines	1 x LVDS input, 1 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 2 x Open drain output,
Specific non-isolated lines	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines	0 x Optical isolated input, 0 x Optical isolated input,
Power supply	Power over CoaXPress
Power consumption	21 W (typical)

Operating conditions

Operating temperature (housing)	-10 °C to 60 °C
---------------------------------	-----------------

Mechanical properties

Body dimensions (L x W x H in mm)	49 × 80 × 80
IP class	IP30
Lens mount(s)	Flat Front
Weight	630 g

Interfaces

Digital interface	cxp-12 with 4 connections
Interface connector	(micro-BNC)

FW features - image control


Exposure modes	external
Gain modes	Digital, Analog
Image control features	FW Features - Image Control

FW features - camera control



Trigger modes/sync	External TTL Signal, CXP-Trigger
--------------------	----------------------------------



preliminary

Quantum Efficiency

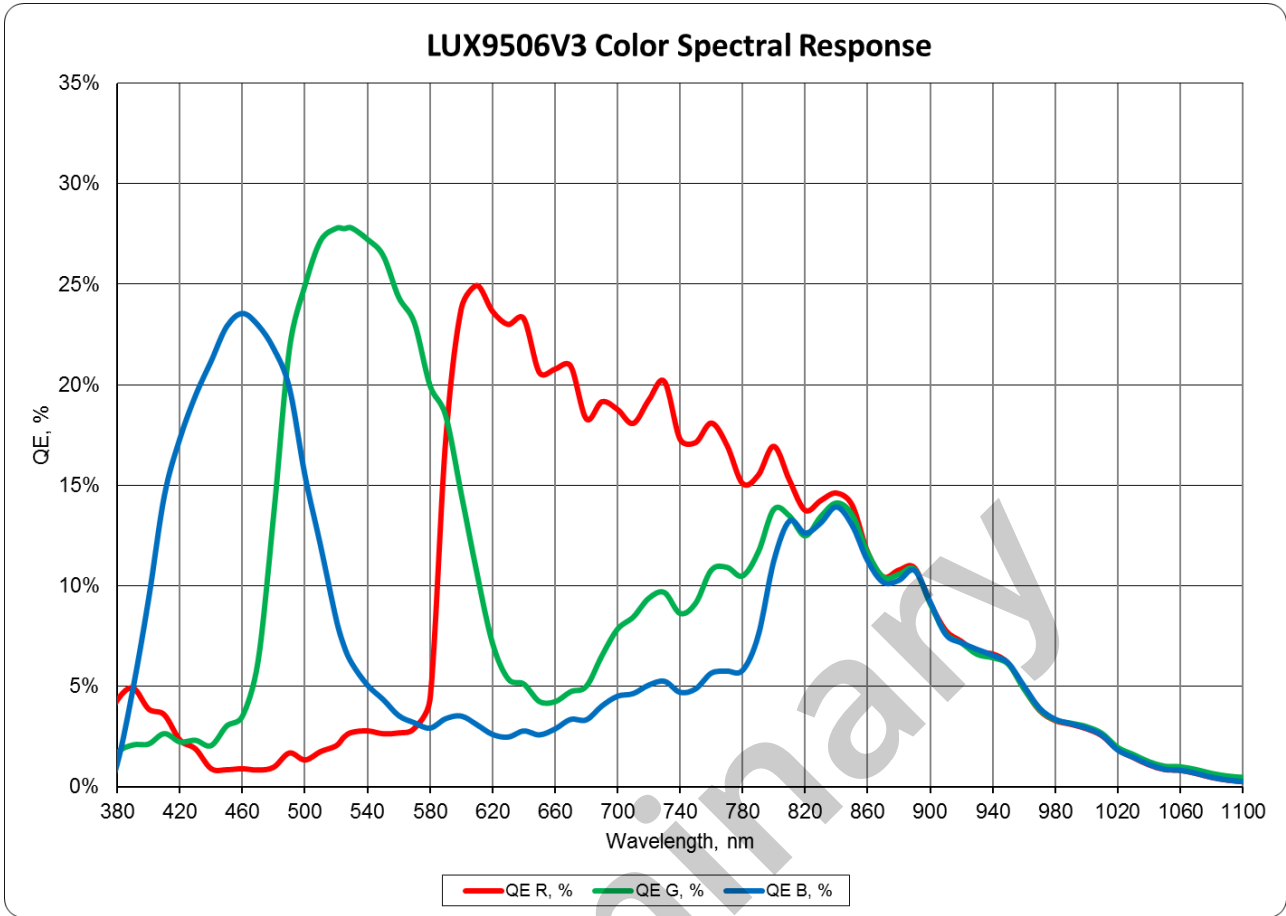

Technical Drawing

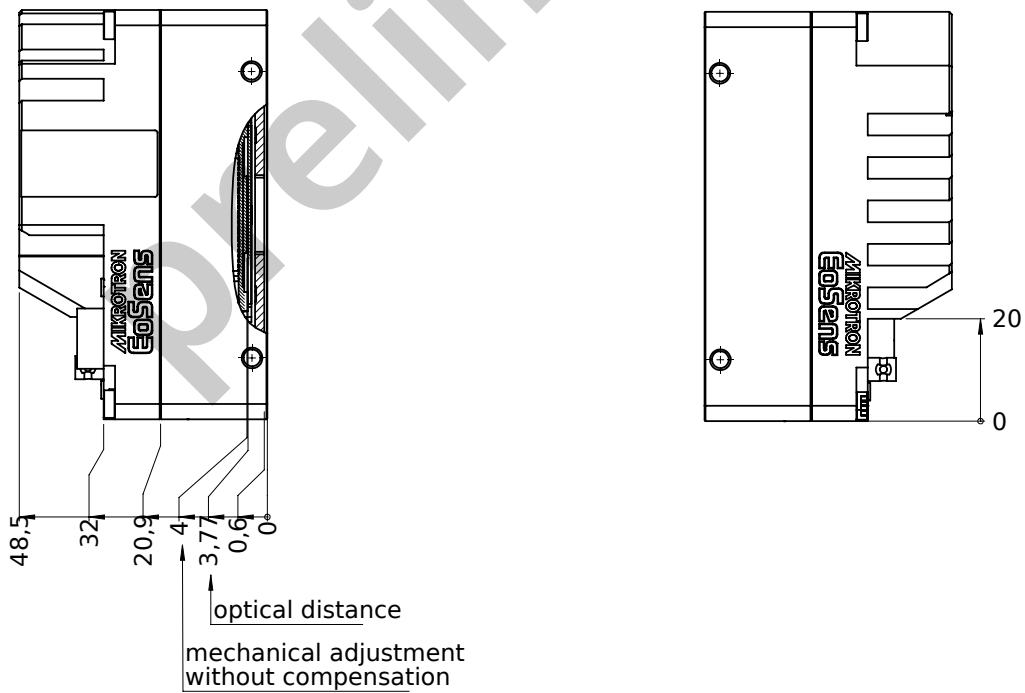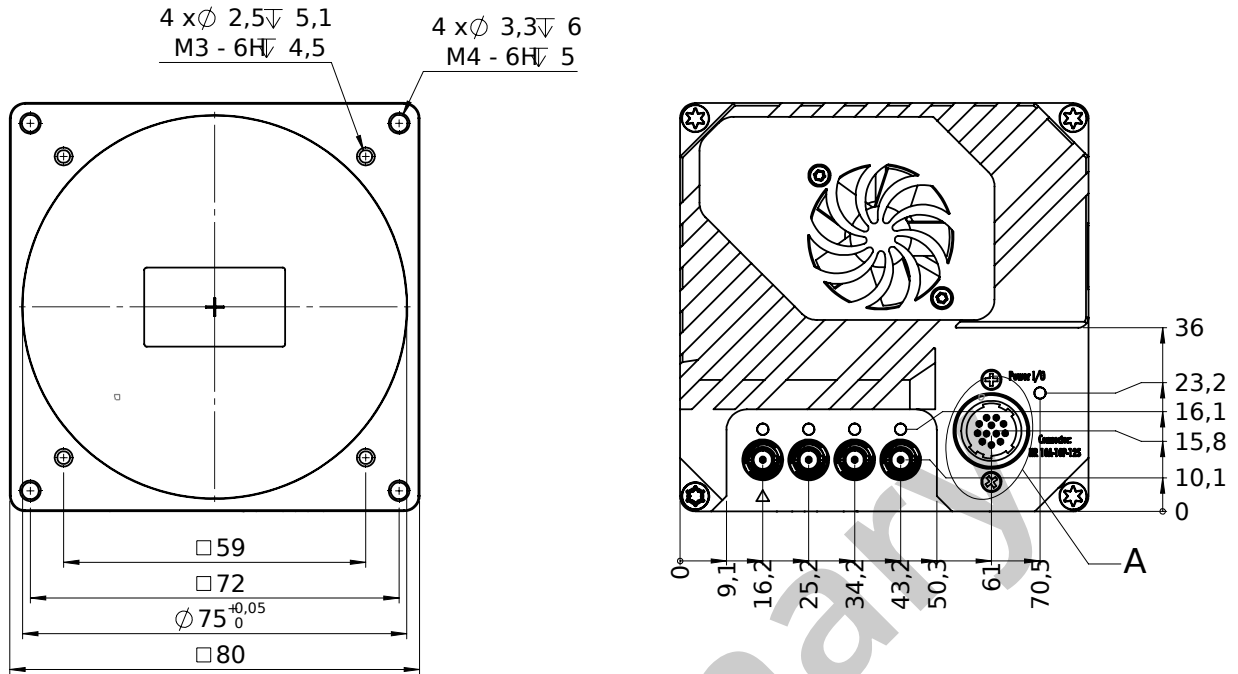

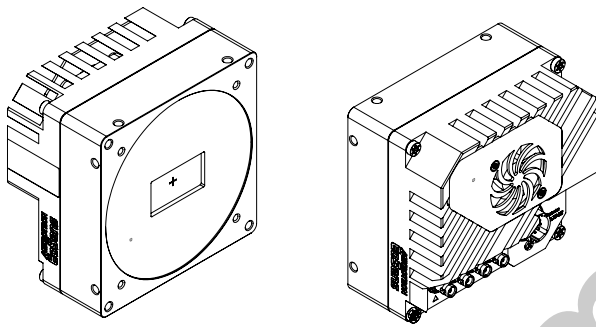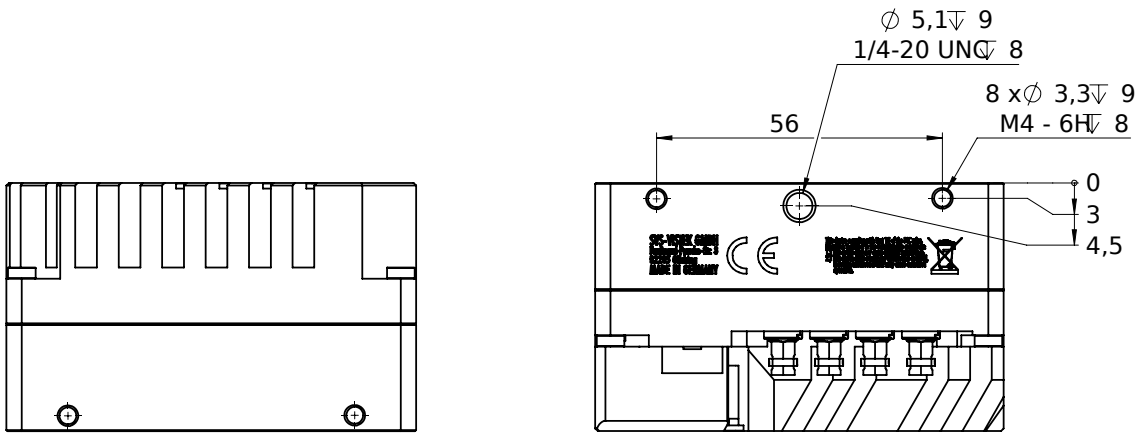

I/O pin assignment

Pin	Signal	Pin	Signal
1	V _{out} - (GND)	7	OUT 1 (open drain)
2	V _{out} + (24 V)	8	OUT 2 (open drain)
3	IN 4 Rx/D (RS 232)	9	LVDS Input P
4	OUT 4 Tx/D (RS 232)	10	LVDS Input N
5	IN 1 (0-24 V)	11	LVDS Output P
6	IN 2 (0-24 V)	12	LVDS Output N

