

# EXO USB3

exo4000CU3



## General

Model	exo4000CU3
Product code	F001628
Product series	EXO USB3
Status	Available

## Sensor

Sensor type	Area scan
Chroma	Color
Spectrum	Visible
Spectral range	400 nm to 1000 nm
Resolution	2,048 × 2,048 (4.00 MP)
Sensor model	CMOSIS/ams CMV4000
Sensor architecture (material)	cmos
Shutter type(s)	global-shutter
Sensor size	11.26 × 11.26 mm (15.93 mm, 15.9mm (1"))
Pixel size	5.50 μm × 5.50 μm

## Pixel formats

Sensor bit depth	8-Bit,12-Bit,12-Bit
RGB pixel formats	bayer8, bayer12packed

## Imaging performance

Dynamic range	52 dB
SNR	38 dB

## Timing and gain

Max. frame rate	74 fps
Exposure time	27 $\mu$ s to 60 s
Gain	0.0 dB to 11.0 dB

## I/Os and power

Non-isolated lines	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
Specific non-isolated lines	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines	1 x Optical isolated input, 0 x Optical isolated input,
Power supply	10 to 25VDC
Power consumption	External: 4.5 W (typical)

## Mechanical properties

Body dimensions (L x W x H in mm)	47 x 50 x 50
Filter/protection glass	IR-Cut - 680nm
IP class	IP40
Lens mount(s)	C-Mount
Weight	138 g

## On-board memory and FPGA

Image buffer (RAM)	192 MByte
Non-volatile memory (Flash)	32 MByte

## Interfaces

Digital interface	usb3.0
Interface connector	(Micro-B)

## FW features - image control


Exposure modes	Manual, Auto, External
Gain modes	Auto, Manual
White balance modes	auto, manual
Image control features	FW Features - Image Control

## FW features - camera control

Trigger modes/sync INTERNAL,SOFTWARE,EXTERNAL


Camera control features User Sets, PWM(4), Sequencer,

Quantum Efficiency

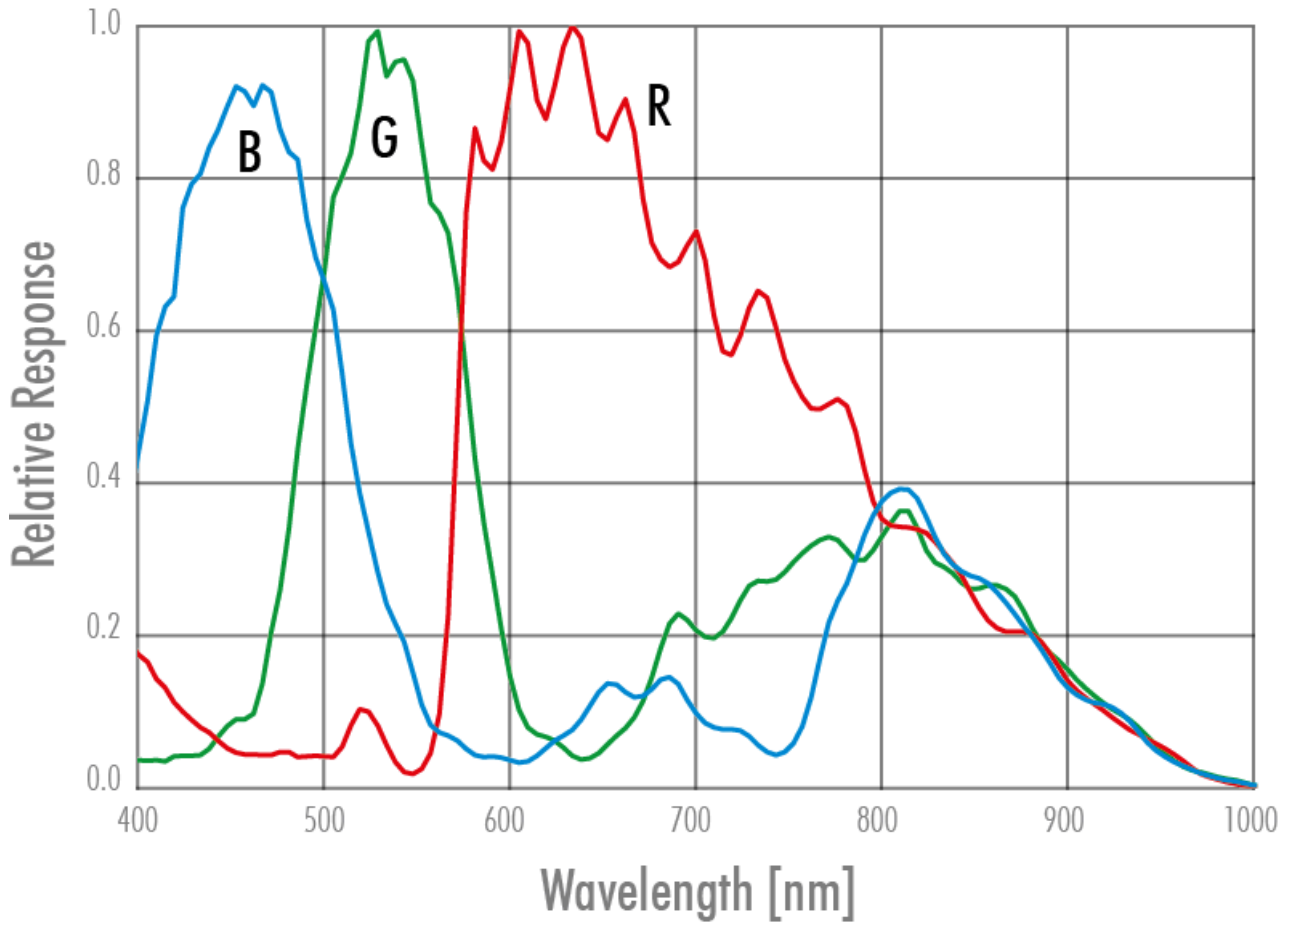


Technical Drawing


front

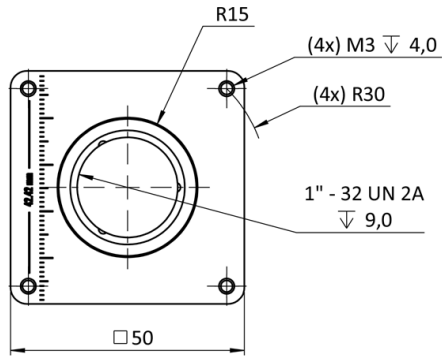


back

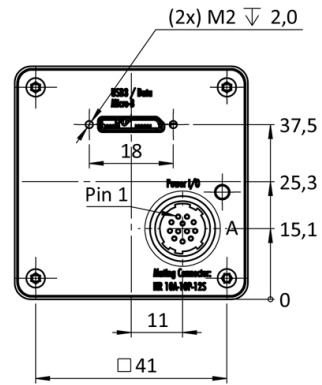


cross section

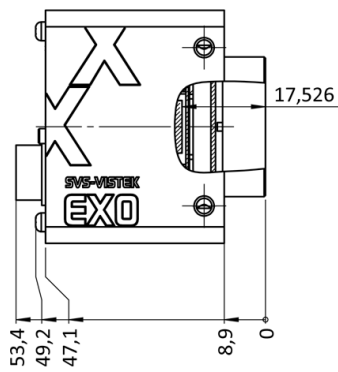



right side

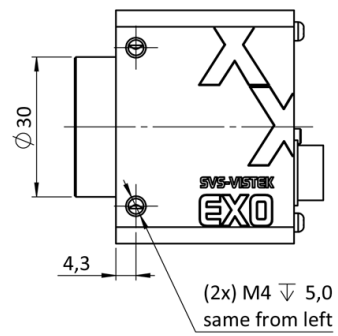

top

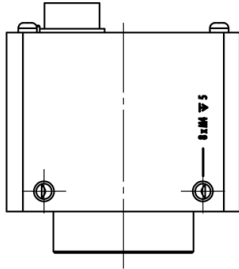

bottom

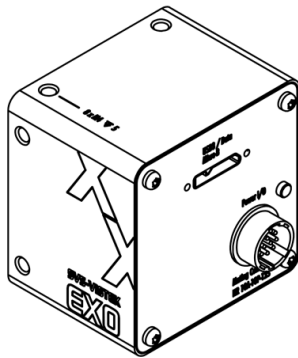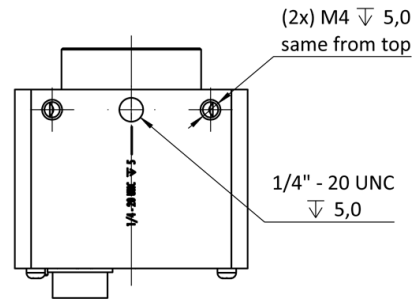

## I/O pin assignment



1	VIN - (GND)	7	OUT 1 (open drain)
2	VIN + (10V to 25V DC)	8	OUT 2 (open drain)
3	IN 4 (RXD RS232)	9	IN 3 + (opto In +)
4	OUT 4 (TXD RS232)	10	IN 3 - (opto In -)
5	IN 1 (0-24V)	11	OUT 3 (open drain)
6	IN 2 (0-24V)	12	OUT 0 (open drain)