FXO 10GigE

fxo547CXGE



□□

□□	fxo547CXGE
□□□□	F002125
□□□□	FXO 10GigE
□□	Available

□□□

□□□□□	Area scan
□□	Color
□□	Visible
□□□□	400 nm to 1000 nm
□□□	2,448 × 2,048 (5.00 MP)
□□□□□	Sony IMX547
□□□□□□□□□	cmos
□□□□	Global shutter (GS)
□□□□□	6.71 × 5.61 mm (8.75 mm, Type 1/1.8)
□□□□	2.74 µm × 2.74 µm

□□□□

□□□□□□	8-bit, 12-bit
RGB□□□□	bayer8, bayer12

□□□□

□□□□	72 dB
□□□	39 dB

Allied Vision

□□□□□

□□□□	124 fps
□□□□	6 µs to 60 s
□□	0.0 dB to 48.0 dB

I/O□□□

□□□□□IO	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
□□□□□□□IO	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
□□□□□□	1 x Optical isolated input, 0 x Optical isolated input,
I/O□□	12-pin Hirose HR10A-10P-12S
□□□□	10 to 25VDC, Power over Ethernet
□□	External: 9 W (typical)

□□□□

□□□□□□□	-10 °C to 60 °C

□□□□

□□□□L x W x H mm□	76 × 50 × 50
□□□/□□□□	IR-Cut - 680nm
IP□□□□	IP30
□□□□	C-Mount
□□	240 g

□□□□FPGA

□□□□RAM□	896 MByte
□□□□□□□□□□□	32 MByte

□□

□□□□	10gige
□□□□□	(RJ-45)
□□□□	GigE Vision 2.0

□□□□ - □□□□

□□□□	manual, auto, external


□□□□ - □□□□

□□□□	auto, manual
□□□□□	auto, manual
□□□□□□	roi, lut, color-transformation, mirror-image


□□□□ - □□□□


□□□□/□□	internal, software, external
□□□□□□	PTP, User Sets, POE, PWM(4), Sequencer,


Quantum Efficiency

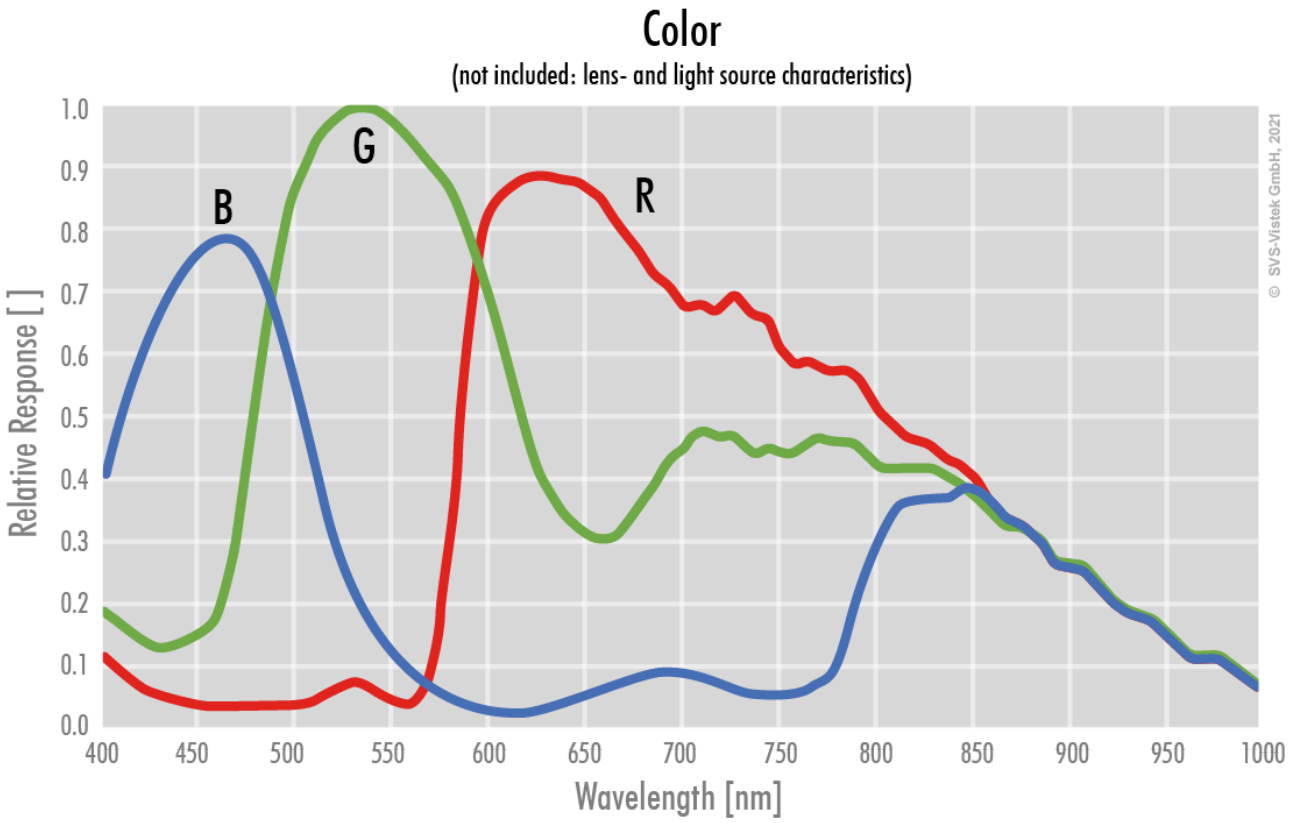



Technical Drawing

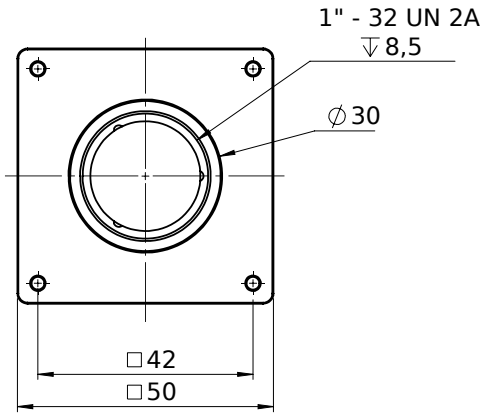


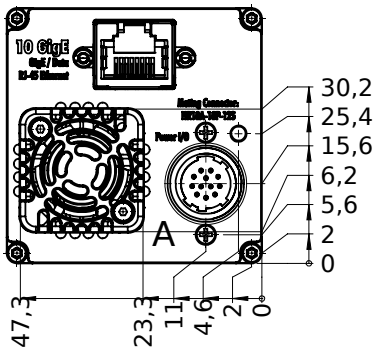


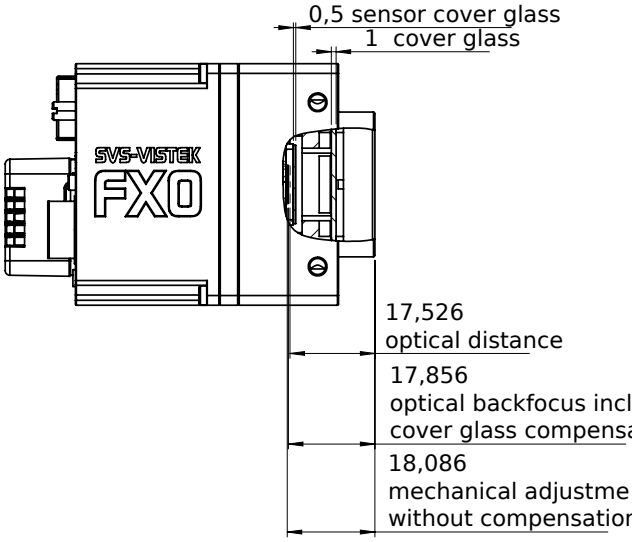

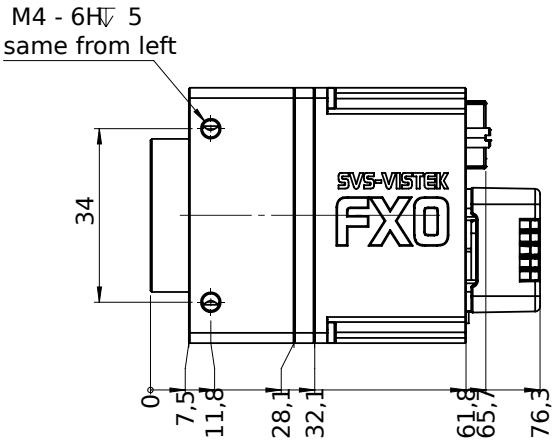

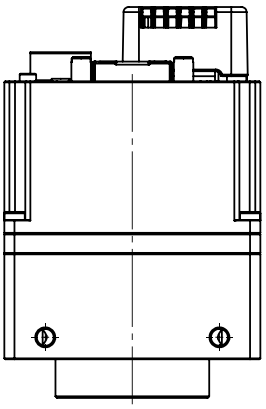


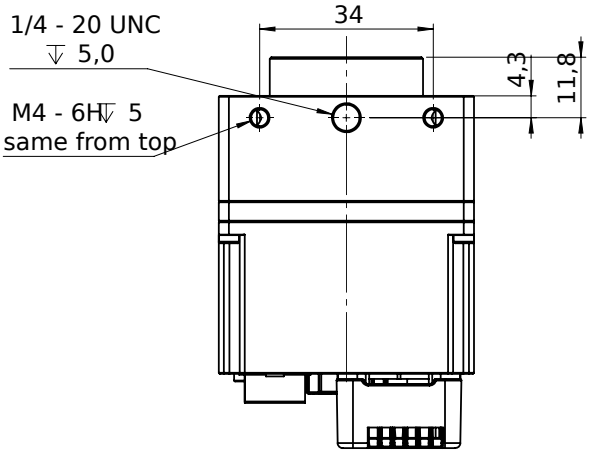

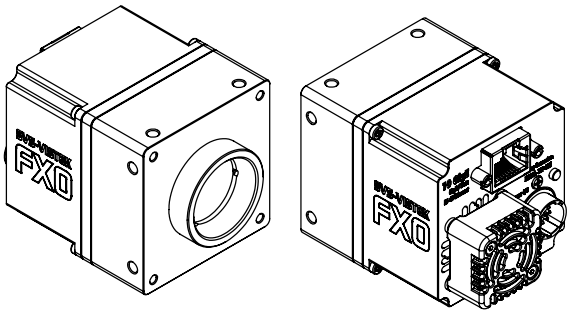

I/O pin assignment

Hirose 12 Pin



1	VIN –	(GND)	7	OUT 1	(open drain)
2	VIN +	(10 V to 25 V DC)	8	OUT 2	(open drain)
3	IN 4	(RXD RS232)	9	IN 3 +	(opto In +)
4	OUT 4	(TXD RS232)	10	IN 3 –	(opto In –)
5	IN 1	(0 - 24V)	11	OUT 3	(open drain)
6	IN 2	(0 - 24V)	12	OUT 0	(open drain)