



General

Model:	exo342CGE
Product code:	F002159
Product series:	EXO GigE
Status:	Available

Sensor

Sensor type:	Area scan
Chroma:	Color
Spectrum:	Visible
Spectral range:	400 nm to 1000 nm
Resolution:	6,464 × 4,852 (31.40 MP)
Sensor model:	Sony IMX342LQA
Sensor architecture (material):	cmos
Shutter type(s):	global-shutter
Sensor size:	22.3 × 16.74 mm (27.88 mm, 27.9mm (APS-C))
Pixel size:	3.45 μm × 3.45 μm

Pixel formats

Sensor bit depth:	8-Bit,12-Bit,12-Bit
RGB pixel formats:	bayer8, bayer12packed

Imaging performance

Dynamic range:	70.5 dB
SNR:	39.9 dB

Timing and gain

Max. frame rate:	3.8
Max. frame rate burst:	7.6 fps
Exposure time:	56 μ s to 60 s
Gain:	0.0 dB to 48.0 dB

I/Os and power

Non-isolated lines:	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
Specific non-isolated lines:	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines:	1 x Optical isolated input, 0 x Optical isolated input,
Power supply:	10 to 25VDC, Power over Ethernet
Power consumption:	External: 6 W (typical)

Operating conditions

Operating temperature (housing):	-10 °C to 65 °C
----------------------------------	-----------------

Mechanical properties

Body dimensions (L x W x H in mm):	46 × 58 × 58
Filter/protection glass:	K9 - AR coating
IP class:	IP40
Lens mount(s):	M42
Weight:	400 g

On-board memory and FPGA

Image buffer (RAM):	192 MByte
Non-volatile memory (Flash):	32 MByte

Interfaces

Digital interface:	gige
Interface connector:	(RJ-45)

FW features - image control

Exposure modes:	Manual, Auto, External
-----------------	------------------------

FW features - image control

Gain modes: Auto, Manual

White balance modes: auto, manual

Image control features: FW Features - Image Control


FW features - camera control

Trigger modes/sync: INTERNAL,SOFTWARE,EXTERNAL


Camera control features: PTP, BurstMode, User Sets, POE, PWM(4), Sequencer,

Quantum Efficiency


Sensor data – excludes camera cover- or IR-cut filter characteristics

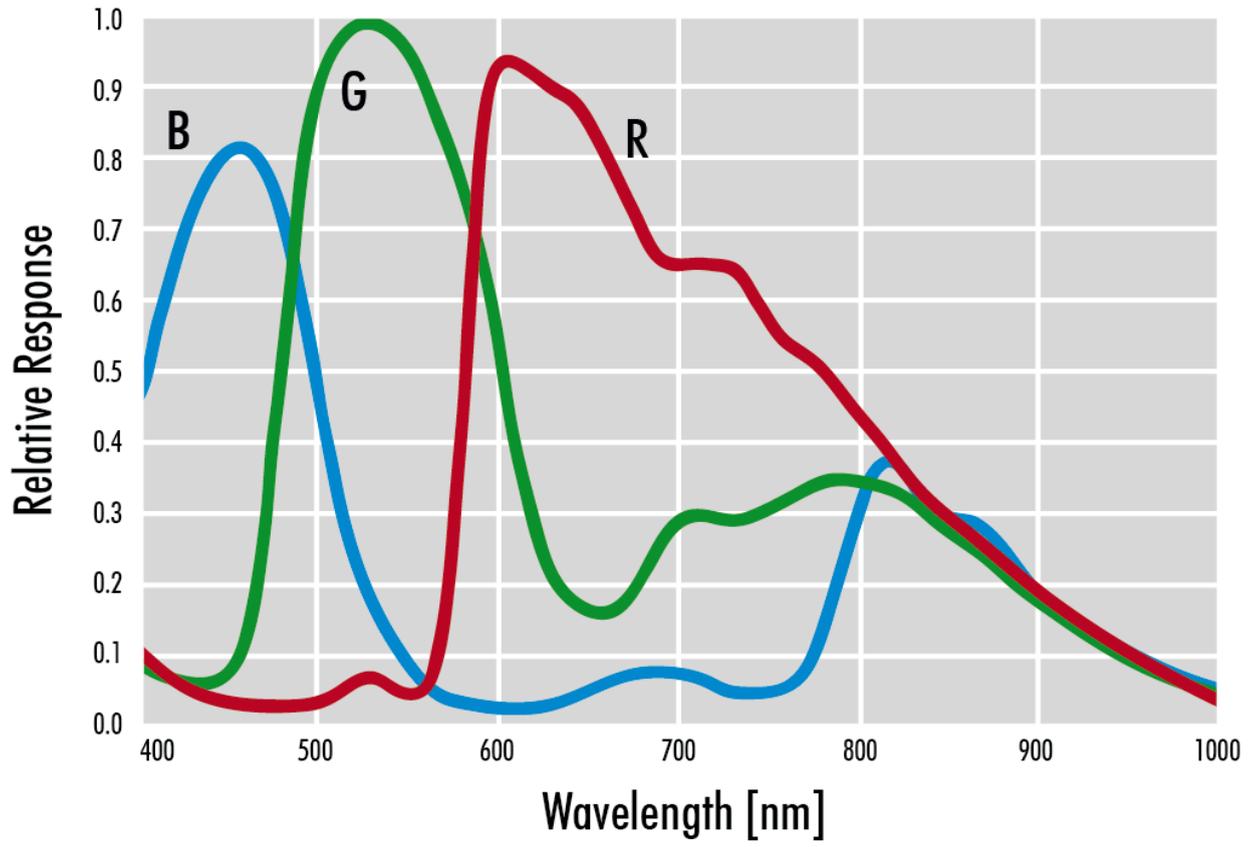


front

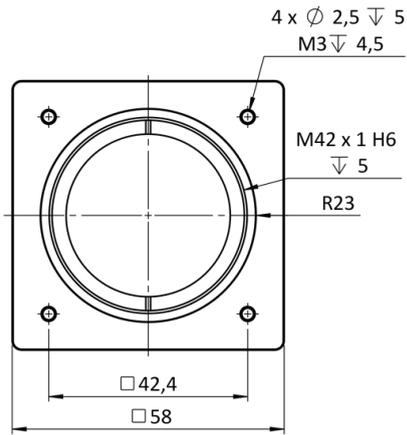


back

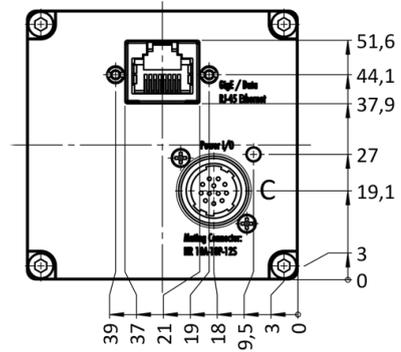


cross section

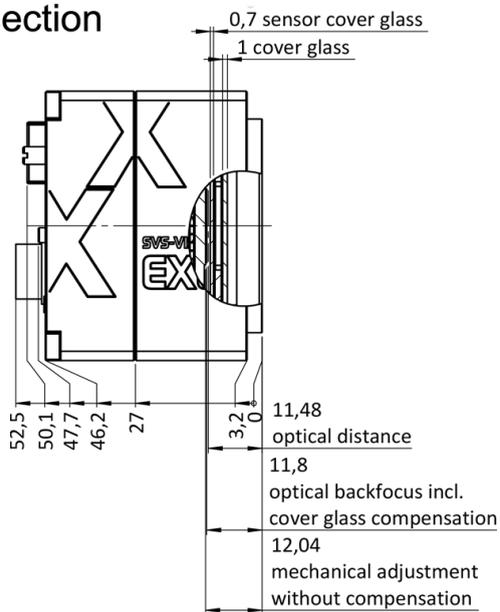


right side

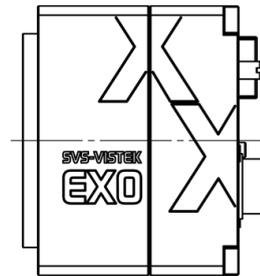


top

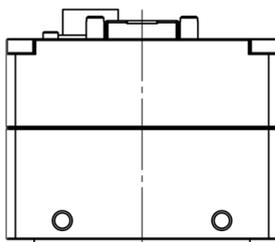


bottom

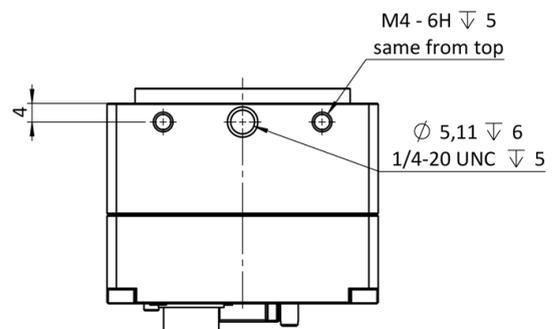

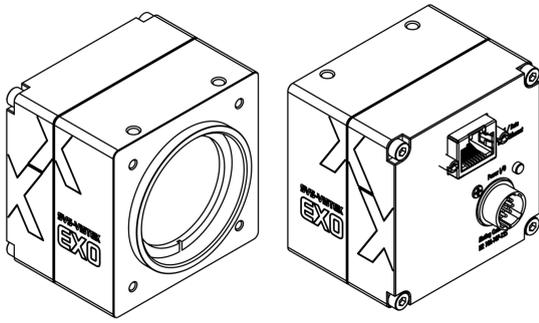

I/O pin assignment

Hirose 12 Pin



1	VIN - (GND)	7	OUT 1 (open drain)
2	VIN + (10 V to 25 V DC)	8	OUT 2 (open drain)
3	IN 4 (RXD RS232)	9	IN 3 + (opto In +)
4	OUT 4 (TXD RS232)	10	IN 3 - (opto In -)
5	IN 1 (0-24V)	11	OUT 3 (open drain)
6	IN 2 (0-24V)	12	OUT 0 (open drain)