

Prosilica GT

Prosilica GT 2050NIR

Prosilica GT2050NIR is a 4.2 Megapixel camera with a GigE Vision compliant Gigabit Ethernet port and Hirose I/O port. This camera incorporates a NIR-optimized variant of the high-quality CMOSIS/ams CMV4000 CMOS sensor. At 900 nm this sensor offers double the quantum efficiency, an increase from 8% to 16% absolute.

General

Model	Prosilica GT 2050NIR
Product series	Prosilica GT
Status	Available

Sensor

Sensor type	Area scan
Chroma	Mono
Spectrum	Visible NIR
Resolution	2,048 × 2,048 (4.20 MP)
Sensor model	CMOSIS/ams CMV4000 NIR
Sensor architecture (material)	cmos
Shutter type(s)	Global shutter (GS)
Sensor size	11.26 × 11.26 mm (16 mm, Type 1)
Pixel size	5.50 µm × 5.50 µm

Pixel formats

Sensor bit depth	12-bit
------------------	--------

Imaging performance

Quantum efficiency @ 529 nm	79 %
Quantum efficiency @ 850 nm	42 %

Timing and gain

Max. frame rate	28 fps
Exposure time	50 µs to 126 s
Gain	0.0 dB to 26.0 dB

I/Os and power

Non-isolated lines	1 input, 2 outputs
Specific non-isolated lines	1
Opto-isolated lines	1 input, 2 outputs
Power supply	7 to 25 VDC AUX or 802.3at Type 1 PoE
Power consumption	3.5 W at 12 VDC; 4.3 W PoE

Operating conditions

Operating temperature (housing)	-20 °C to 65 °C (ambient (without condensation))
---------------------------------	--

Mechanical properties

Body dimensions (L x W x H in mm)	86 × 53 × 33
Weight	210 g


On-board memory and FPGA

Image buffer (RAM)	128 MByte
Non-volatile memory (Flash)	1024 KByte

Interfaces

Digital interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)
-------------------	---

Quantum Efficiency

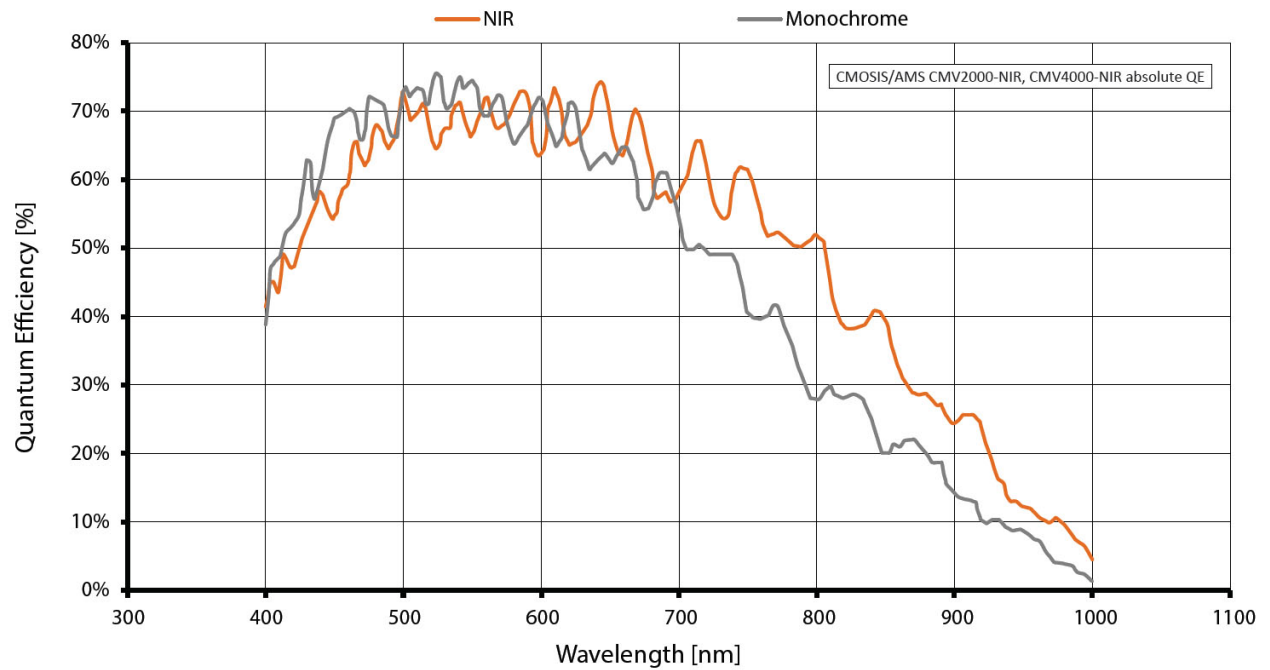

Technical Drawing

