

# Prosilica GT

## 4907



- Versatile temperature range for extreme environments
- IEEE 1588 PTP
- Power over Ethernet
- 7.6 fps @ full resolution

## Description

15.7 Megapixel CCD camera for extreme environments - GigE Vision®

Prosilica GT4907/GT4907C is a 15.7 Megapixel camera with a GigE Vision compliant Gigabit Ethernet interface. This camera incorporates the high quality ON Semiconductor KAI-16070 CCD TRUESENSE sensor providing excellent monochrome and color image quality. It is a rugged camera designed to operate in extreme environments. It is a large format housing camera with a standard F-Mount lens mount. By default monochrome models ship with no optical filter and color models ship with an IRC30 IR cut filter.

Options:


- Various IR cut/pass filters and lens mounts
- Class 1 sensor

See the Modular Concept for lens mount, optical filters, and sensor options.

## Specifications

Prosilica GT	4907
Interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)
Resolution	4864 (H) × 3232 (V)
Sensor	ON Semi KAI-16070
Sensor type	CCD Progressive
Cell size	7.4 μm x 7.4 μm
Lens mount	F-Mount
Max frame rate at full resolution	7.6 fps
ADC	14 bit

<b>Prosilica GT</b>	<b>4907</b>
Image buffer (RAM)	128 MByte
<b>Output</b>	
Bit depth	14 (monochrome); 12 (color) bit
Mono modes	Mono8, Mono12, Mono12Packed, Mono14
Color modes YUV	YUV411Packed, YUV422Packed, YUV444Packed
Color modes RGB	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed
Raw modes	BayerGR8, BayerGR12, BayerRG12Packed
<b>General purpose inputs/outputs (GPIOs)</b>	
TTL I/Os	1 input, 2 outputs
Opto-isolated I/Os	1 input, 2 outputs
RS-232	1
<b>Operating conditions/dimensions</b>	
Operating temperature	-20 °C to +50 °C ambient (without condensation)
Power requirements (DC)	7 to 25 VDC; PoE
Power consumption (@12 V)	7.7 W @ 12 VDC; 9.5 W PoE
Mass	372 g
Body dimensions (L × W × H in mm)	96 × 66 × 53.3 (including connectors)
Regulations	CE, RoHS, REACH, WEEE, FCC, ICES

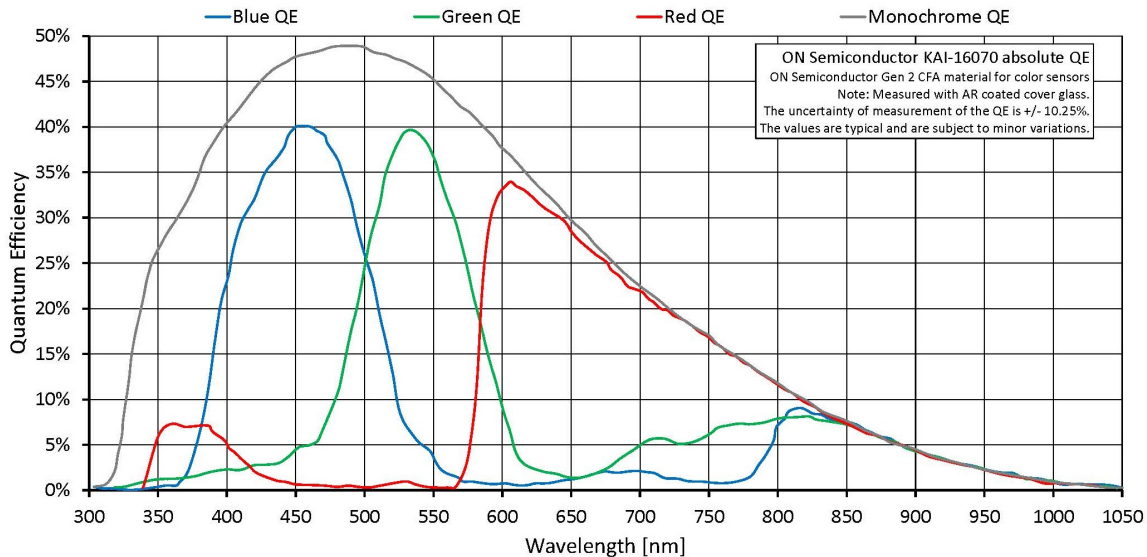



## Features


Image optimization features:

- Auto gain (manual gain control: 0 to 32 dB)
- Auto exposure (manual exposure control: 35  $\mu$ s to 26.8 s)
- Auto white balance (color models only)
- Binning (horizontal and vertical)
- Color correction, hue, saturation (color models only)
- Column defect masking
- Decimation X/Y
- Gamma correction
- Look-up tables (LUTs)
- Region of interest (ROI), separate ROI for auto features
- Reverse X/Y

Camera control features:

- EF lens control (order option -18)
- Event channel
- Image chunk data
- IEEE 1588 Precision Time Protocol (PTP)
- RS232
- Storable user sets
- StreamBytesPerSecond (easy bandwidth control)
- StreamHold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Tap mode switchable in Vimba Viewer 2.0 or later (four-tap, one-tap)
- Temperature monitoring (main board and sensor board)
- Trigger over Ethernet (ToE) Action Commands

## Technical drawing

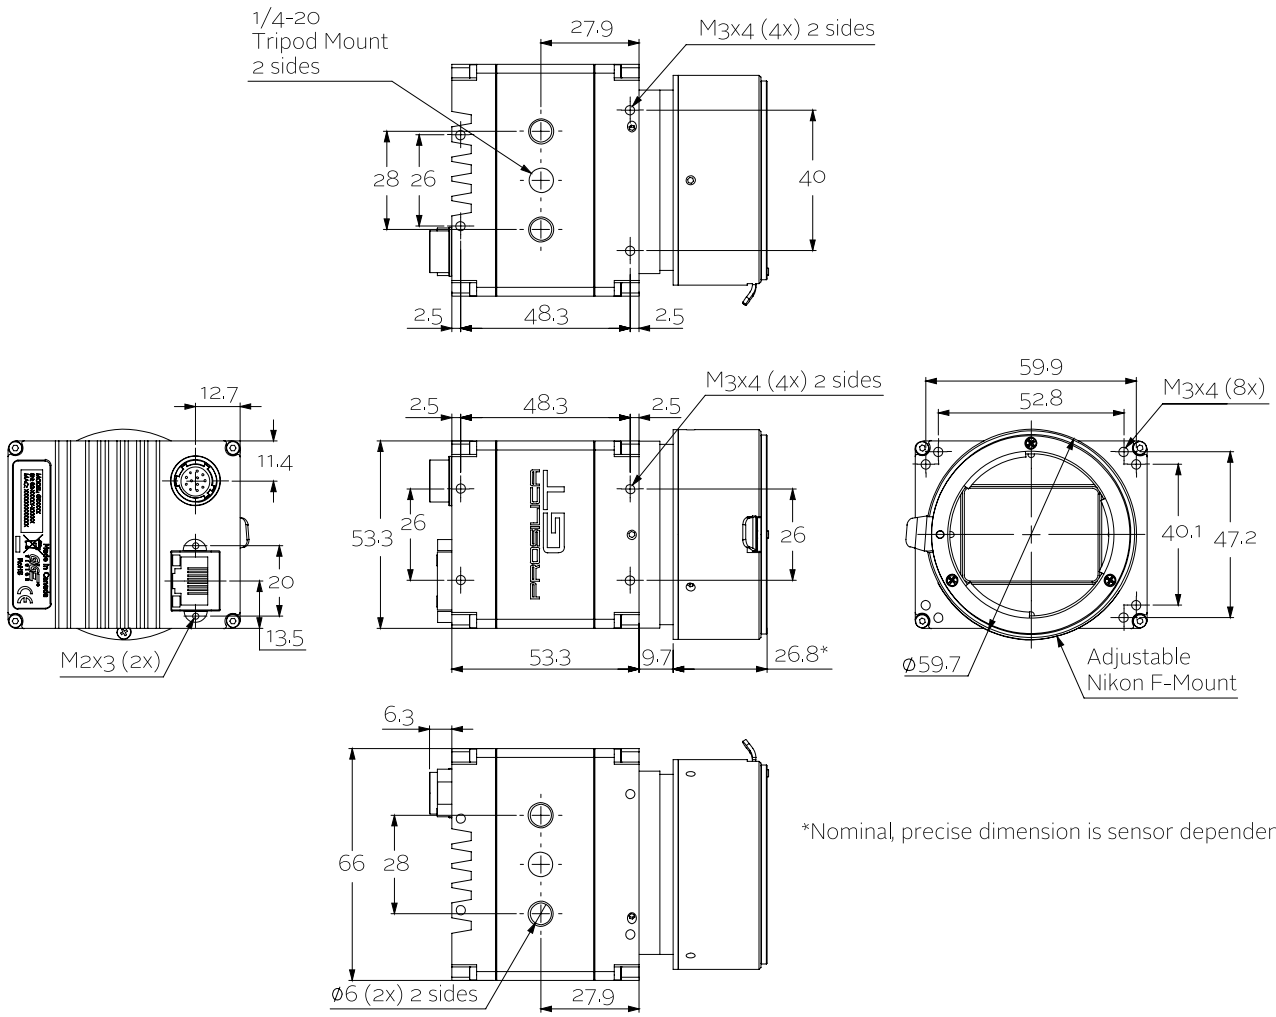



## Applications

Prosilica GT4907/GT4907C is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / Intelligent Traffic Systems (ITS)
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications