Allied Vision



Goldeye Pro

Goldeye Pro G5-130 VSWIR TEC1

Goldeye Pro G5-130 VSWIR TEC1 5GBASE-T camera with global shutter Sony IMX990 SenSWIR InGaAs sensor enables short wave infrared (SWIR) imaging with industrial performance for various machine vision applications.

□□	
□□□	Goldeye Pro G5-130 VSWIR TEC1
□□□□□□□	Goldeye Pro
□□□□□	Available

□□□□	
□□□□□□□□	Area scan
□□□	Mono
□□□□□	SWIR, Visible SWIR
□□□□□□□□	400 nm to 1700 nm
□□□	1,296 × 1,032 (1.30 MP)
□□□□□□□□	Sony IMX990 | InGaAs | TEC
□□□□□□□□□□□	cmos-ingaas
□□□□□□□□□	Global shutter (GS)
□□□□□□□□	6.4 × 5.1 mm (8.2 mm, Type 1/2)
□□□□□□□□	5.00 µm × 5.00 µm

□□□□□□□□□□	
□□□□□□□□□□	10-bit, 12-bit, 8-bit
□□□□□□□□□□□□□□□□	Mono12 (default)

□□□□□□□□□□	
□□□□□□□□□□	125 fps
□□□□	21 µs to 114 s
□□□	0.0 dB to 42.0 dB

I/O□□□	
□□□□	4 biderectional I/O lines

I/O□□□

□□□□	1 input, 3 outputs
□□	12 VDC to 24 VDC (±10%) or via PoE
□□□□	Max: 10 W (12 to 24 VDC); 11 W (PoE)

□□□□

□□□□	0 °C to 55 °C (□□)

□□□□□

□□□□□L x W x H mm□	78 × 55 × 55
□□	350 g

□□□□□□□□□FPGA

□□□□□□□RAM□	256 MByte
□□□□□□□□□□□□□□□	4 KByte

□□□□□□□□

□□□□□□□□□□□□□	IEEE 802.3: 5GBASE-T or 2.5GBASE-T (NBASE-T) and 1000BASE-T, IEEE 802.3af Power Class 0 PoE
□□□□□□□□□□□□□	RJ45

Quantum Efficiency

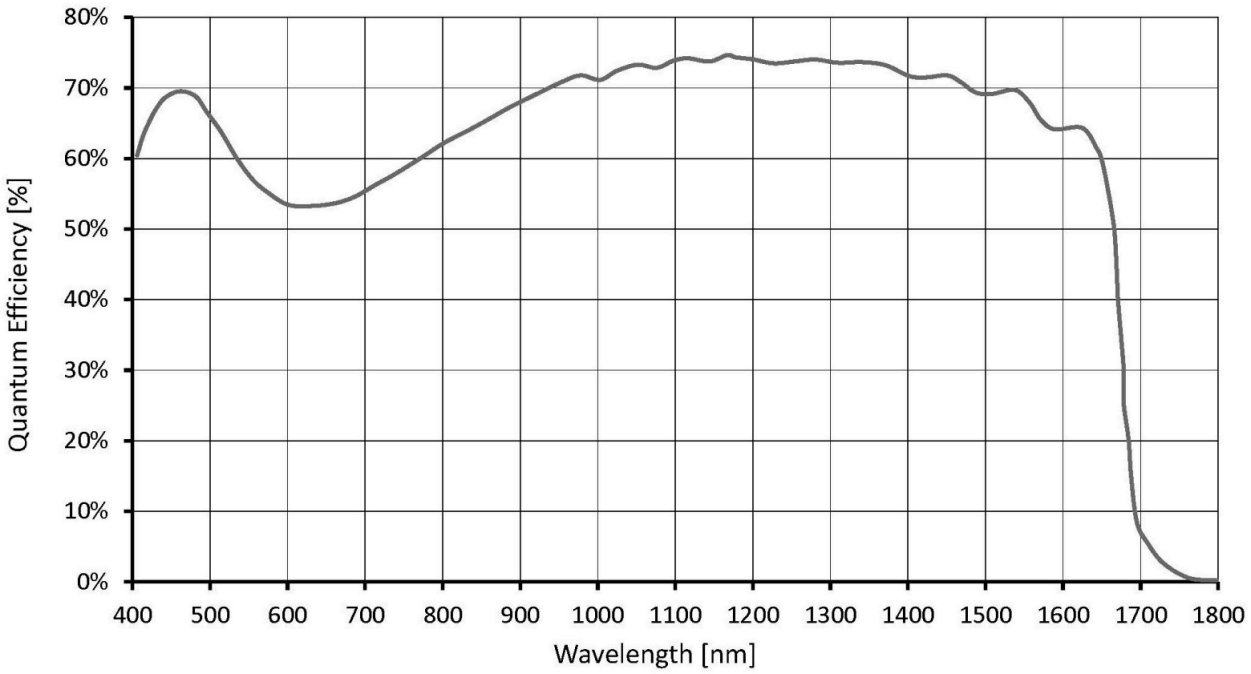

Technical Drawing

