



## Bigeye G G-132 NIR Cool

- Sensitive in both the visible and NIR spectrum
- Exposure time up to more than 4200 s

### Description

#### NIR optimized camera with Sony ICX285, Peltier cooling -20 °C

The Bigeye G-132B NIR Cool is distinguished by high performance both in the visible spectrum and the NIR spectrum; its Sony ICX285 CCD sensor is modified for enhanced NIR sensitivity.


Benefits and features:

- GigE Vision, multi-functional, user-configurable I/O interface
- Sony ICX285 EXview HAD CCD sensor, 1280 x 1024 pixels, extended sensitivity ranging from 350 nm to 1000 nm, peltier cooling, stabilized to -20 °C, exposure time up to 4292 s ( $\approx$  71 min)
- Reliable operation under rough industrial conditions

### Specifications

Bigeye G	G-132 NIR Cool
インターフェイス	IEEE 802.3 1000baseT
解像度	1280 (H) × 1024 (V)
センサー	Sony ICX285
Sensor type	CCD Progressive
センサーサイズ	Type 2/3
ピクセルサイズ	6.45 $\mu$ m × 6.45 $\mu$ m
Cooling temperature	-20 °C
Temporal dark noise	tbd
Dark current	tbd
Saturation capacity	tbd
Dynamic range	tbd

Bigeye G	G-132 NIR Cool
レンズマウント (標準搭載)	C-Mount
フレームレート (フル解像度)	12.5 fps
ADC	12 bit
Image buffer (RAM)	32 MByte
Output	
Bit depth	12 bit
ビデオフォーマット(Mono)	Mono8, Mono12, Mono12Packed
General purpose inputs/outputs (GPIOs)	
TTL I/Os	1/1
Opto-isolated I/Os	3/3
RS232	2
Operating conditions/dimensions	
Operating temperature	0 °C to 35 °C
消費電力	max. <36 W @ 12 VDC, typ. <18 W @ 12 VDC
Mass	1270 g
Body dimensions (L × W × H in mm)	100.8 × 90 × 99 (including connectors)
Regulations	CE: 2014/30/EU (EMC), 2011/65/EU (RoHS)

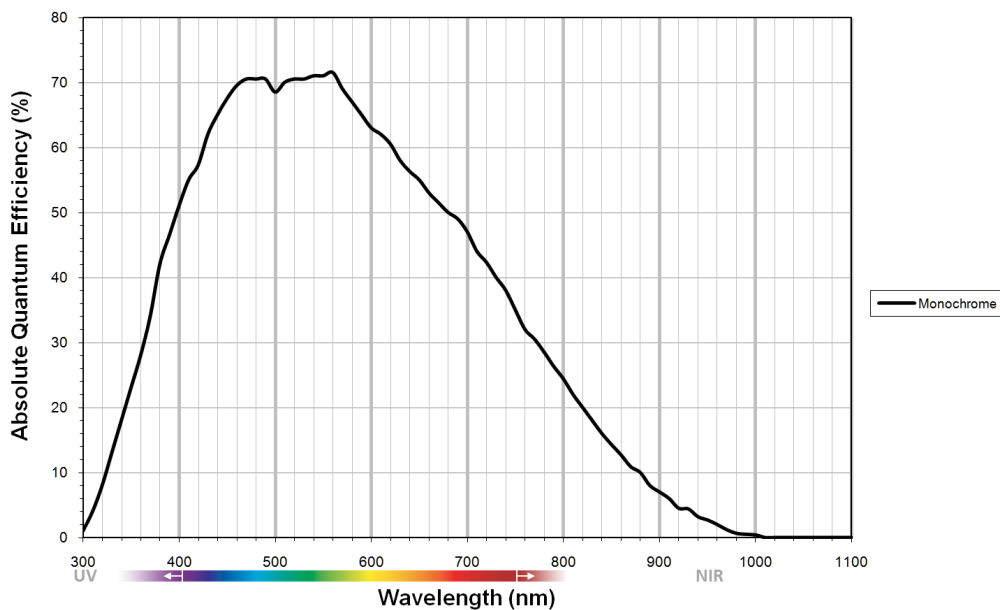

## Features

- Gain (6 dB)
- Exposure time 80077  $\mu$ s to 4294 seconds ( $\approx$  71 min)



- Binning (2x1, 2x2)
- Three look-up tables (LUTs)
- Gamma (0.45, 0.5, 0.7)
- Five storable user sets

#### Easy integration

The Bigeye G-132 NIR Cool can be easily integrated into your application, since it is GigE Vision compliant and compatible with Allied Vision's GigE SDKs. Additionally, this camera can be used with numerous third-party software solutions.



## Applications

The Bigeye G-132B NIR Cool is a prime quality CCD camera that is sensitive both in the visible and the NIR spectrum. It is optimal for applications requiring long exposure times.

Typical applications:

- Low-noise imaging (industrial and scientific imaging)
- Image acquisition with long exposure times
- Microscopy with high resolution
- Fluorescence microscopy
- Gel electrophoresis, DNA documentation
- Non-destructive evaluation of photosensitive objects
- Astronomy
- Solar cell/wafer inspection