

Allied Vision

Goldeye CL

Goldeye CL-032 SWIR Cool TEC2

The Goldeye CL-032 Cool TEC2 is a short-wave infrared camera that is optimized for scientific grade applications often requiring long exposure times. To enable low-noise imaging in the spectral range from 900 nm to 1700 nm the camera is equipped with a nitrogen filled cooling chamber and enables via the dual-stage ther

□반	
모델	Goldeye CL-032 SWIR Cool TEC2
제품 시리즈	Goldeye CL
상태	Available

센서	
센서 유형	Area scan
크로마	Mono
스펙트럼	SWIR
스펙트럼 범위	900 nm to 1700 nm
해상도	636 × 508 (0.36 MP)
센서 모델	Progressive scan 0.36 MP
센서 아키텍처 (소재)	cmos-ingaas
셔터 유형	Global shutter (GS)
센서 크기	15.9 × 12.7 mm (20.4 mm, Type 4/3)
픽셀 크기	25.00 µm × 25.00 µm

픽셀 형식	
센서 비트 심도	14-bit

타이밍 및 게인	
최대 프레임 속도	100 fps
노출 시간	6 µs to 1 s
게인	0.0 dB to 34.0 dB

Allied Vision

I/O □ □□

□□□ □□	LVTTL I/Os: 1 Input, 1 Output
□□ □□□ □□	115 200 Baud, 8N1 (adjustable)
□□□ □□	1 Input, 2 Outputs
□□ □□ □□	10.8 V to 30.0 V
□□ □□	19 W (at 12 VDC)

□□ □□

□□ □□	-20 °C to 55 °C (□□□)

□□□ □□

□□ □□ (L x W x H mm)	90 × 80 × 80
□□	780 g

□□□ □□□ □ FPGA

□□□ □□ (RAM)	256 MByte

□□□□□

□□□ □□□□□	Camera Link Base

Quantum Efficiency

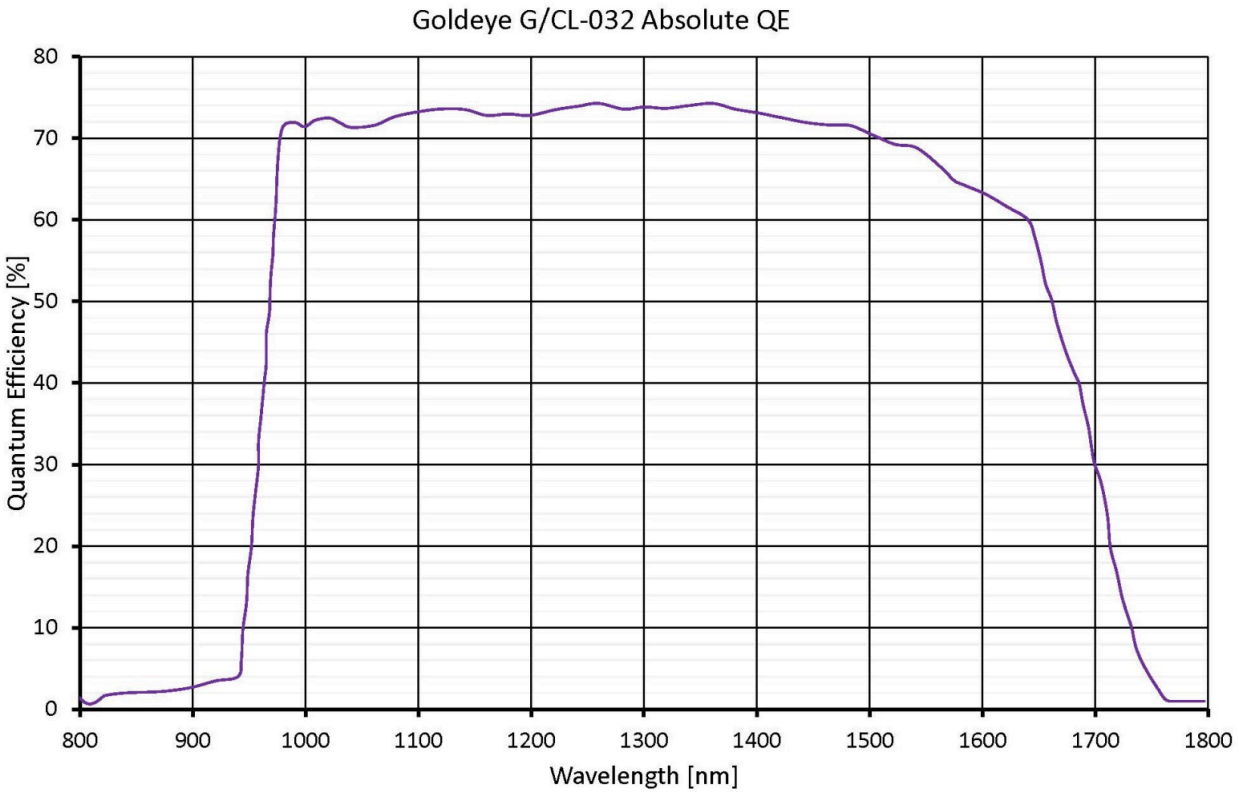

Technical Drawing

