

Goldeye G

Goldeye G-008 SWIR TEC1

The Goldeye G-008 TEC1 is a short wave infrared (SWIR) camera running 344 fps at 1/4-VGA resolution. Its GigE Vision interface enables fast integration for versatile applications at an affordable price.

General

Model	Goldeye G-008 SWIR TEC1
Product series	Goldeye G
Status	Available

Sensor

Sensor type	Area scan
Chroma	Mono
Spectrum	SWIR
Spectral range	900 nm to 1700 nm
Resolution	320 × 256 (0.08 MP)
Sensor model	Progressive scan 0.08 MP
Sensor architecture (material)	cmos-ingaas
Shutter type(s)	Global shutter (GS)
Sensor size	9.6 × 7.68 mm (12.3 mm, Type 1)
Pixel size	30.00 µm × 30.00 µm

Pixel formats

Sensor bit depth	14-bit
------------------	--------

Timing and gain

Max. frame rate	344 fps
Exposure time	6 µs to 200.00 ms
Gain	0.0 dB to 24.0 dB

I/Os and power

Non-isolated lines	LVTTTL I/Os: 1 Input, 1 Output
--------------------	--------------------------------

I/Os and power

Specific non-isolated lines	115 000 Baud, 8N1 (adjustable)
Opto-isolated lines	1 Input, 2 Outputs
Power supply	10.8 V to 30.0 V or via PoE
Power consumption	10.8 W (at 12 VDC), <12.95 W (PoE)

Operating conditions

Operating temperature (housing)	-20 °C to 55 °C ((housing))
---------------------------------	-----------------------------

Mechanical properties

Body dimensions (L x W x H in mm)	78 × 55 × 55
Weight	340 g


On-board memory and FPGA

Image buffer (RAM)	256 MByte
Non-volatile memory (Flash)	262 MByte

Interfaces

Digital interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)
-------------------	---

Quantum Efficiency

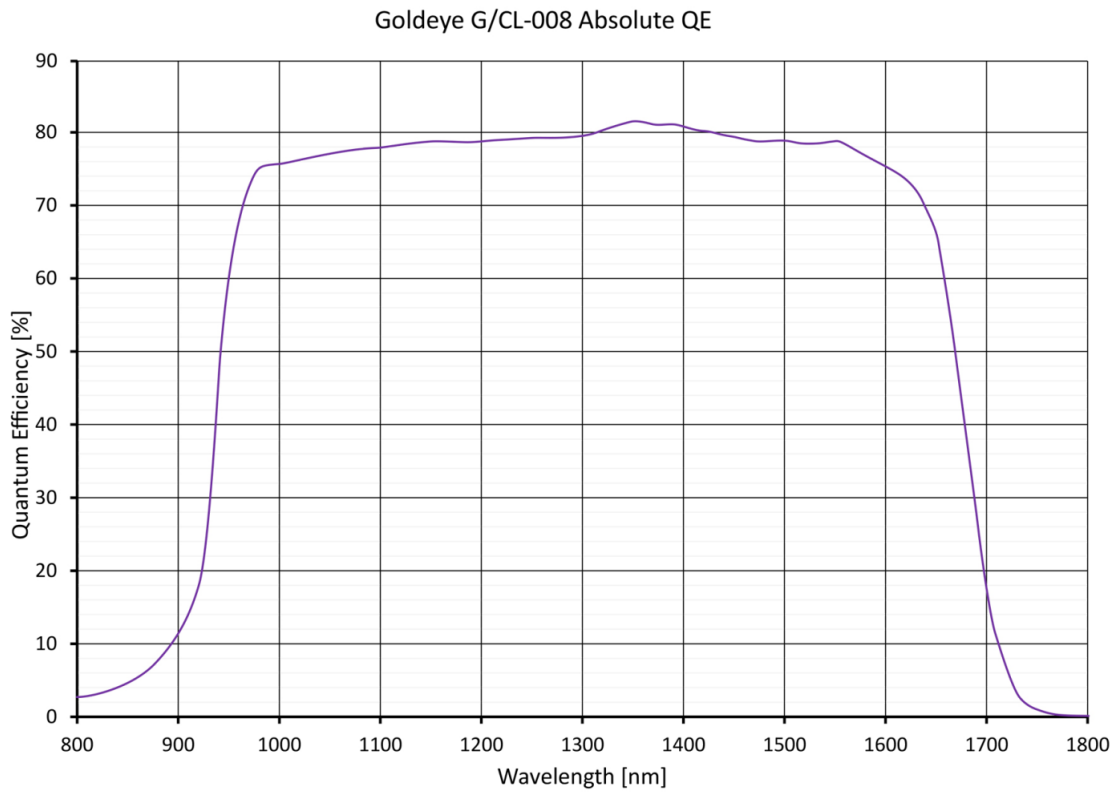

Technical Drawing

