

Allied Vision

Goldeye CL

Goldeye CL-030 VSWIR TEC1

The Goldeye CL-030 TEC1 high-speed camera is one of the fastest VGA resolution short wave infrared (SWIR) cameras with GigE Vision interface. Frame rates up to 234 fps at full resolution enable you to access versatile application fields and to speed up your processes.

一般	
型號	Goldeye CL-030 VSWIR TEC1
產品系列	Goldeye CL
狀態	Available

感測器	
感測器類型	Area scan
色度	Mono
光譜	SWIR, Visible SWIR
光譜範圍	400 nm to 1700 nm
解析度	656 × 520 (0.30 MP)
感測器型號	Sony IMX991 | InGaAs | TEC
感測器架構 (材料)	cmos-ingaas
快門類型	Global shutter (GS)
感測器尺寸	3.28 × 2.6 mm (4.19 mm, Type 1/4)
像素大小	5.00 µm × 5.00 µm

像素格式	
感測器位深	12-bit

時序與增益	
最大影格率	234 fps
曝光時間	3 µs to 200.00 ms
增益	0.0 dB to 18.0 dB

I/O 與電源	
非隔離線	1 input, 1 output

I/O 與電源

特定非隔離線	115 200 Baud, 8N1 (adjustable)
光隔離線	1 input, 2 outputs
電源供應	10.8 V to 30.0 V
功耗	Maximum: 11.8 W (at 12 VDC)

操作條件

操作溫度	-20 °C to 55 °C (機殼)

機械特性

機殼尺寸 (長 x 寬 x 高 mm)	78 × 55 × 55
重量	330 g

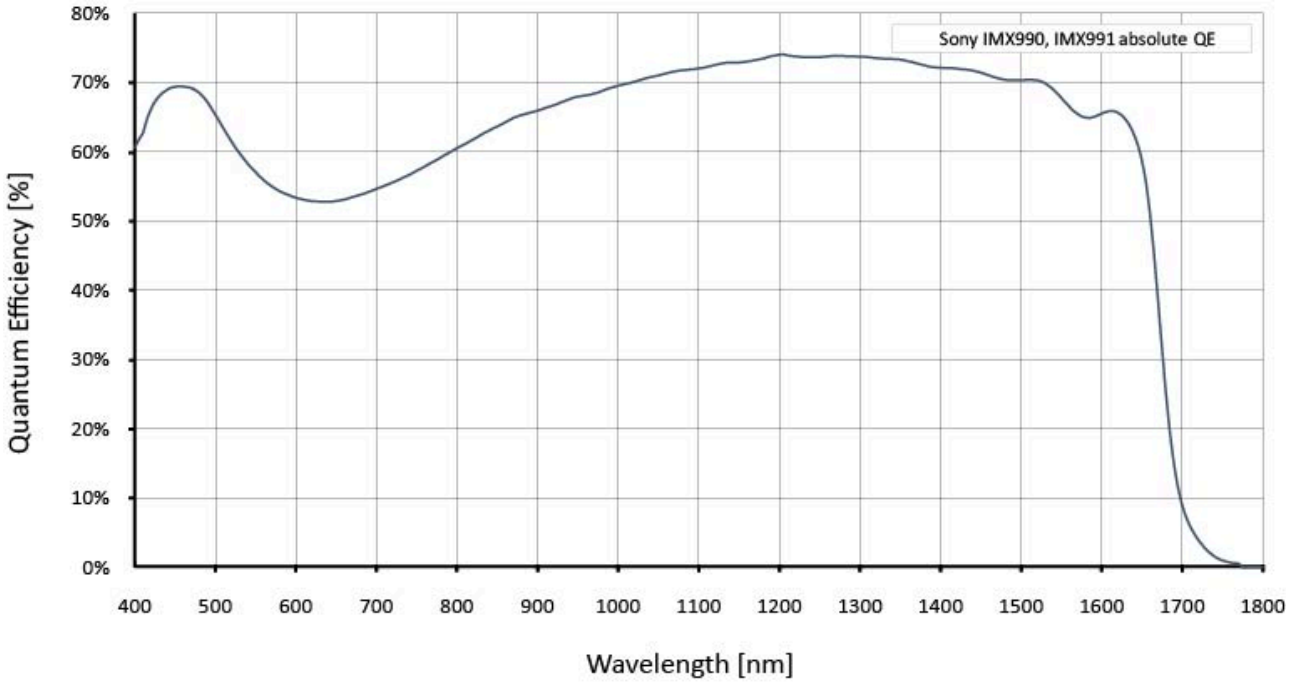
板載記憶體與 FPGA

影像緩衝區 (RAM)	256 MByte

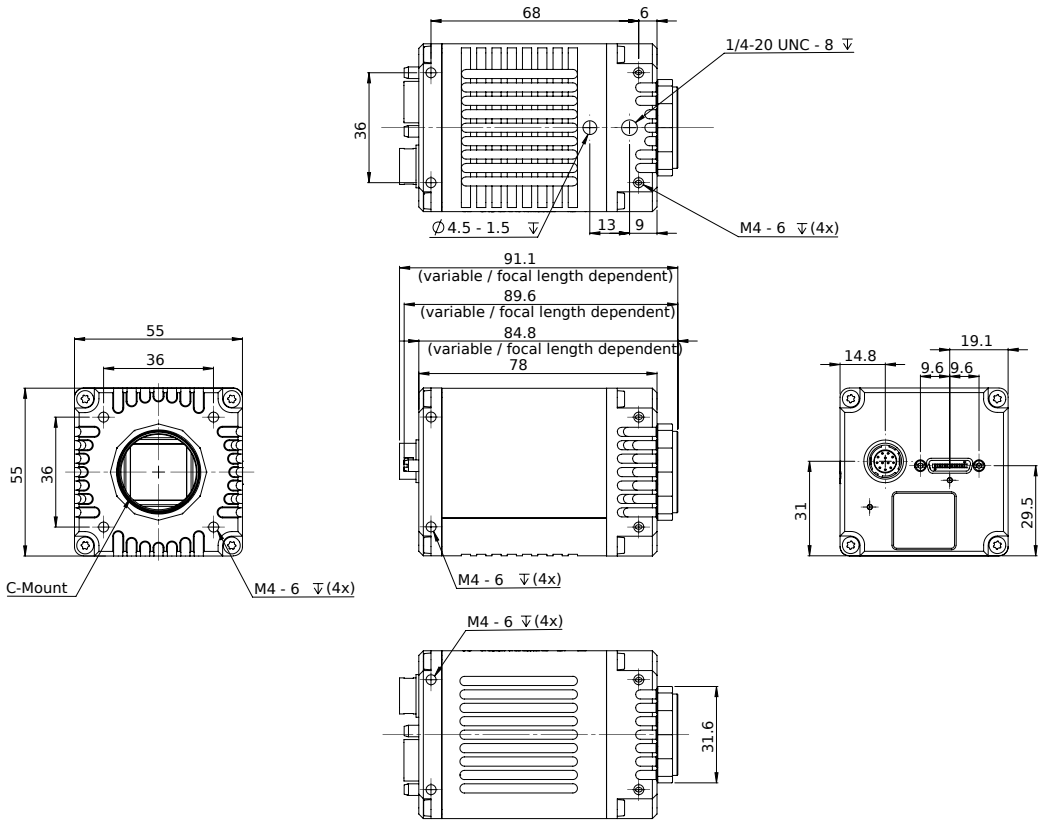
介面

數位介面	Camera Link Base

□□□□


Sony IMX990, IMX991 absolute QE
Quantum Efficiency [%]
80%
70%
60%
50%
40%
30%
20%
10%
0%
400
500
600
700
800
900
1000
1100
1200
1300
1400
1500
1600
1700
1800
Wavelength [nm]

□□□□


68
6
1/4-20 UNC - 8 ↧
36
∅4.5 - 1.5 ↧
13
9
M4 - 6 ↧(4x)
91.1
(variable / focal length dependent)
89.6
(variable / focal length dependent)
84.8
(variable / focal length dependent)
78
M4 - 6 ↧(4x)
55
36
55
36
C-Mount
M4 - 6 ↧(4x)
14.8
19.1
9.6
9.6
31
29.5
M4 - 6 ↧(4x)
31.6