# Whitepaper

**How to perform a CXP Firmwareupdate**

| **Created:** | Date | Department | Name |
|---|---|---|---|
| | 12.01.2024 | Support | Ahess |




© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany

# 1. Preparation

Unpack the updater + Make sure the Firmwarefile is in the same location like the updater

If more than one CXP Framegrabber is installed on the system disable all other framegrabbers temporarily.

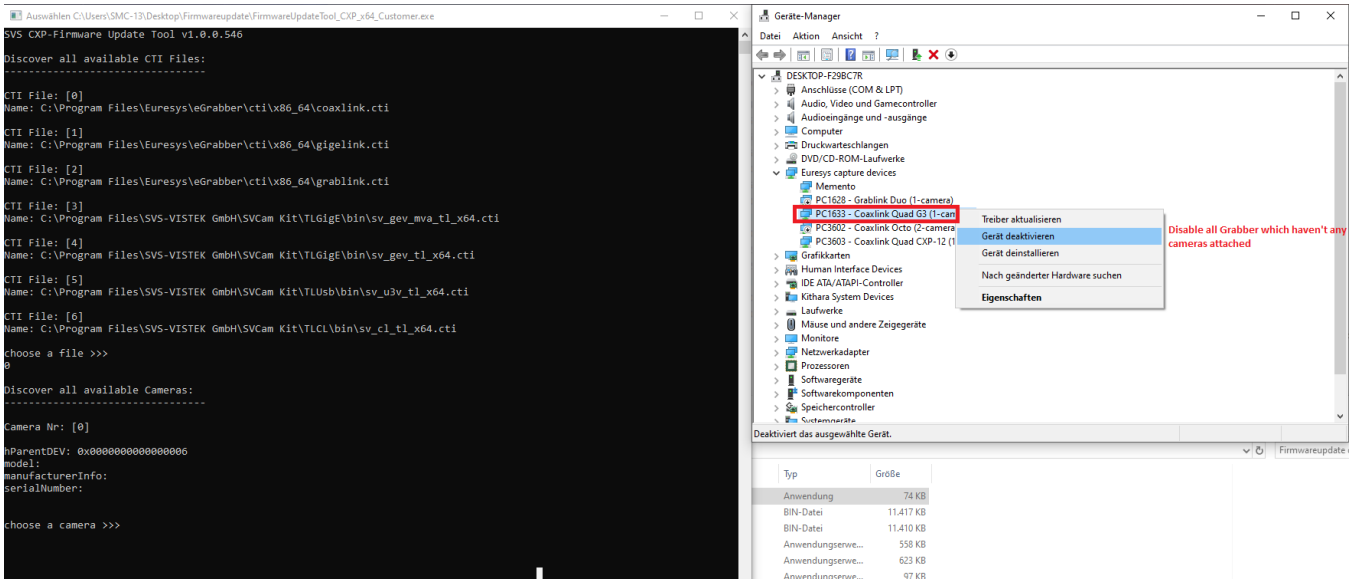





© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany

## 2. Perform the Firmwareupdate

### 2.1) Select the fitting Framegrabber Transportlayer / .cti File


For Euresys choose coaxlink.cti like shown below and confirm with enter

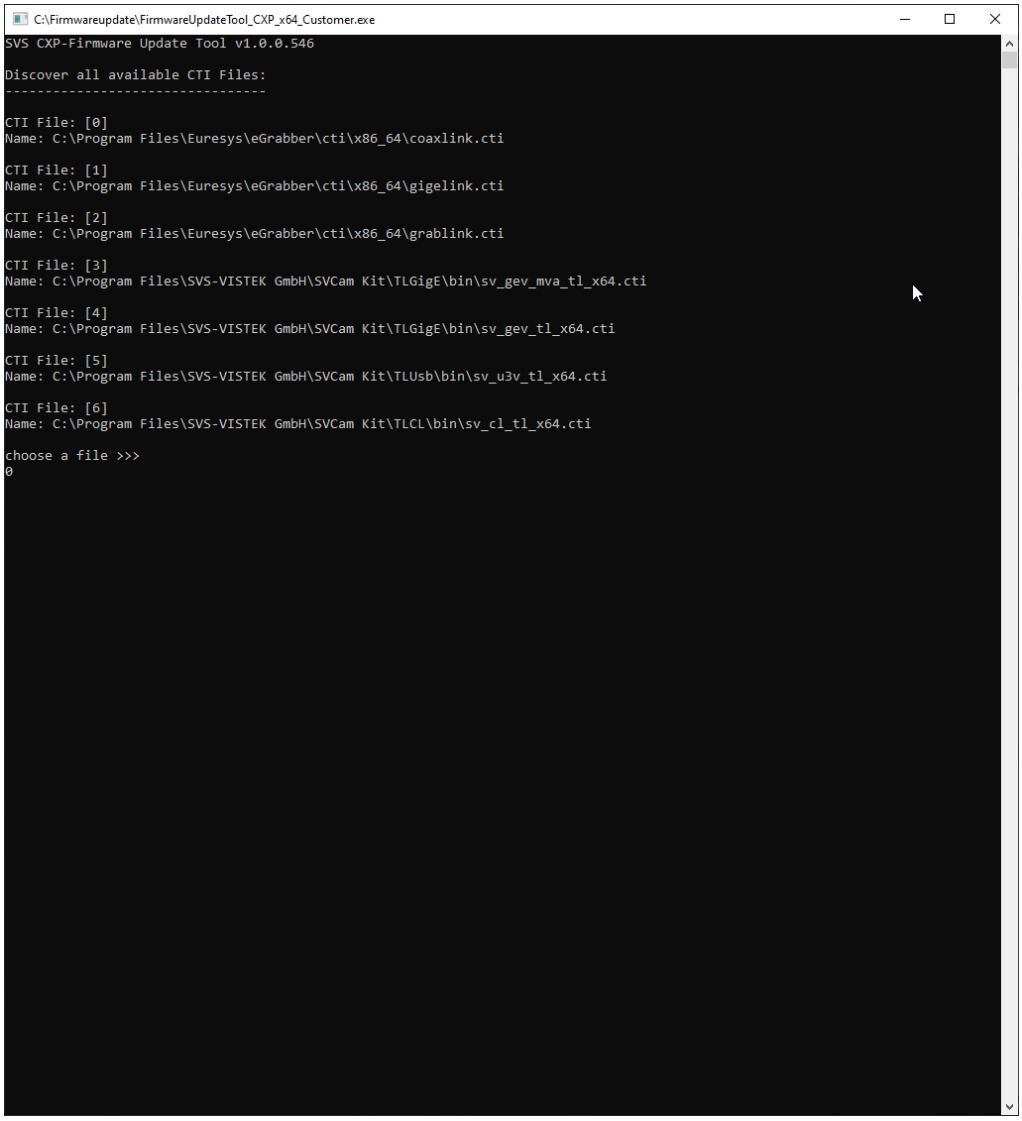




© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany


## 2.2) Select the camera and confirm with enter

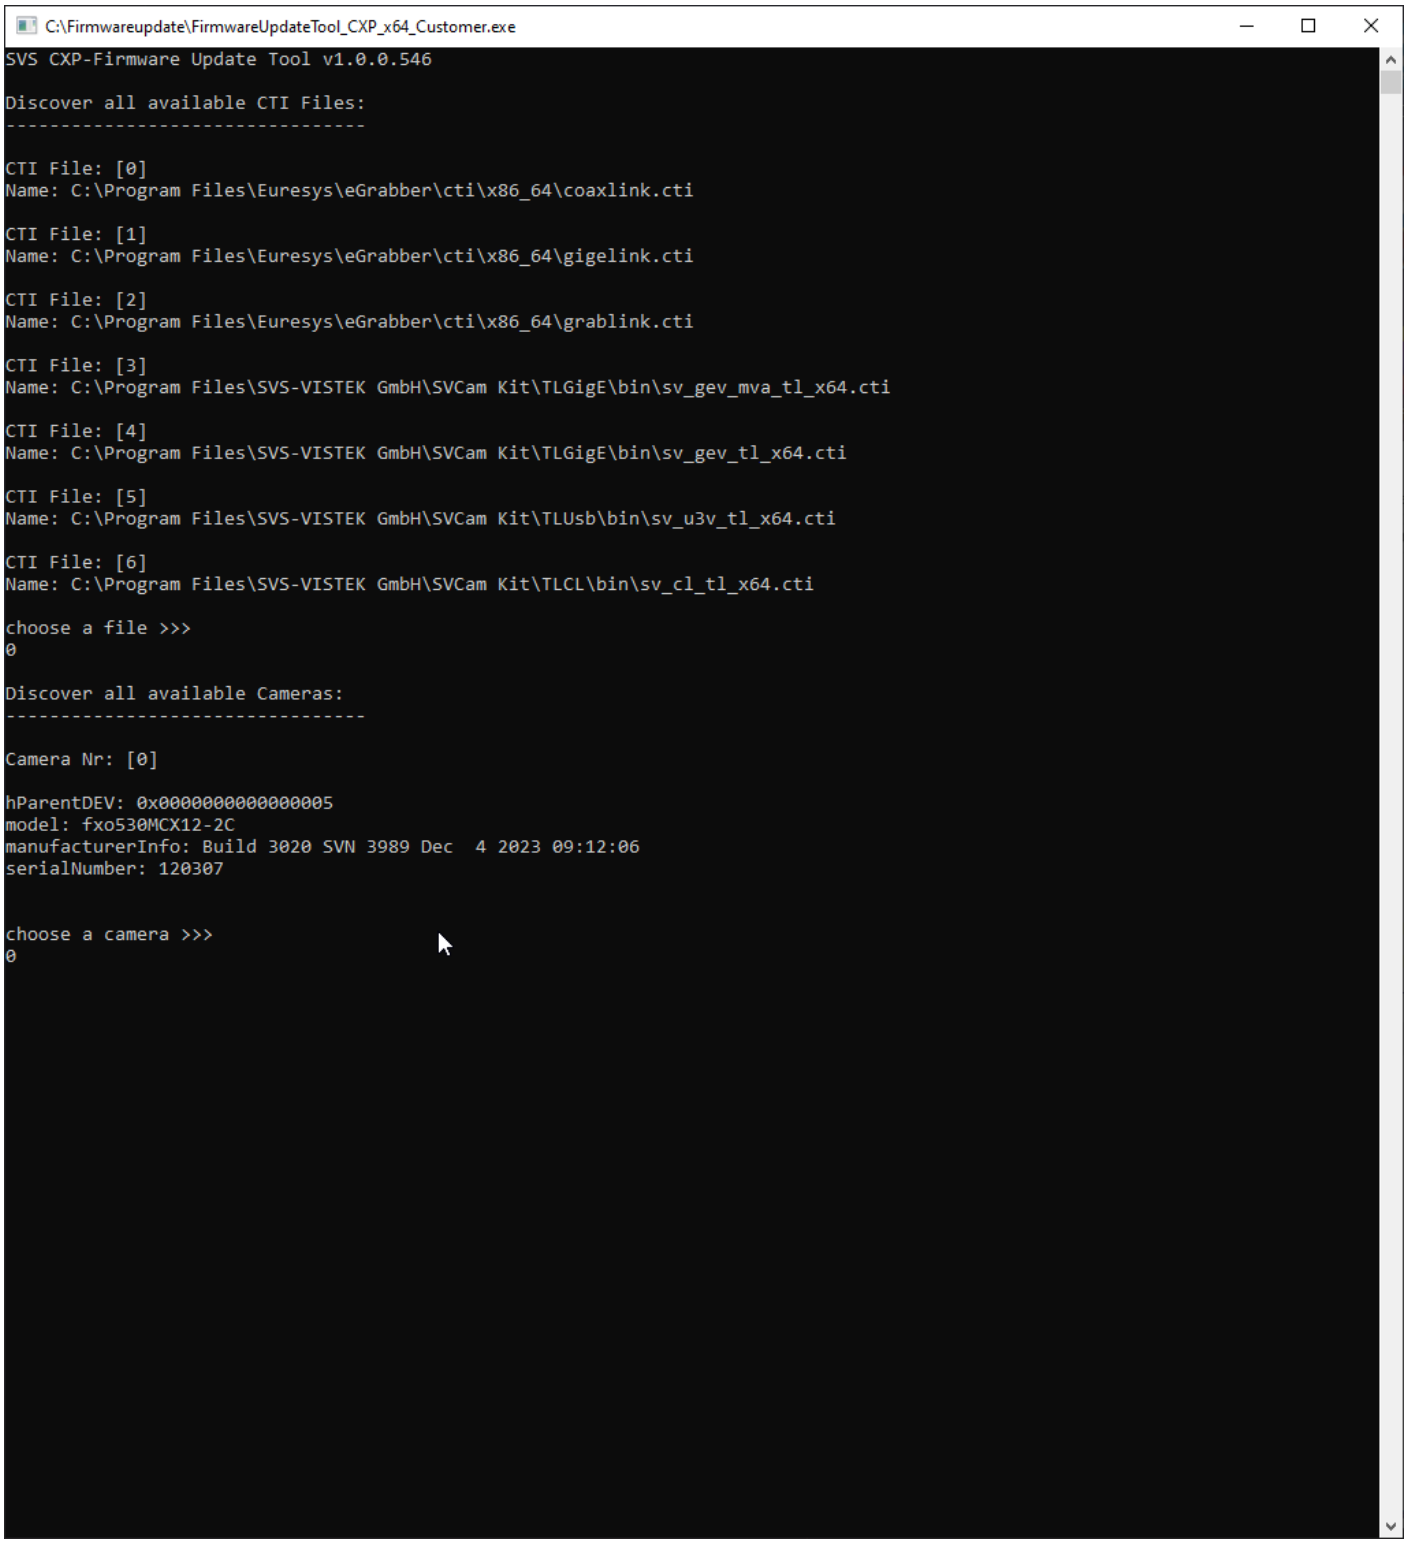




© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany


## 2.3) Select the fitting Firmwarefile and confirm with enter

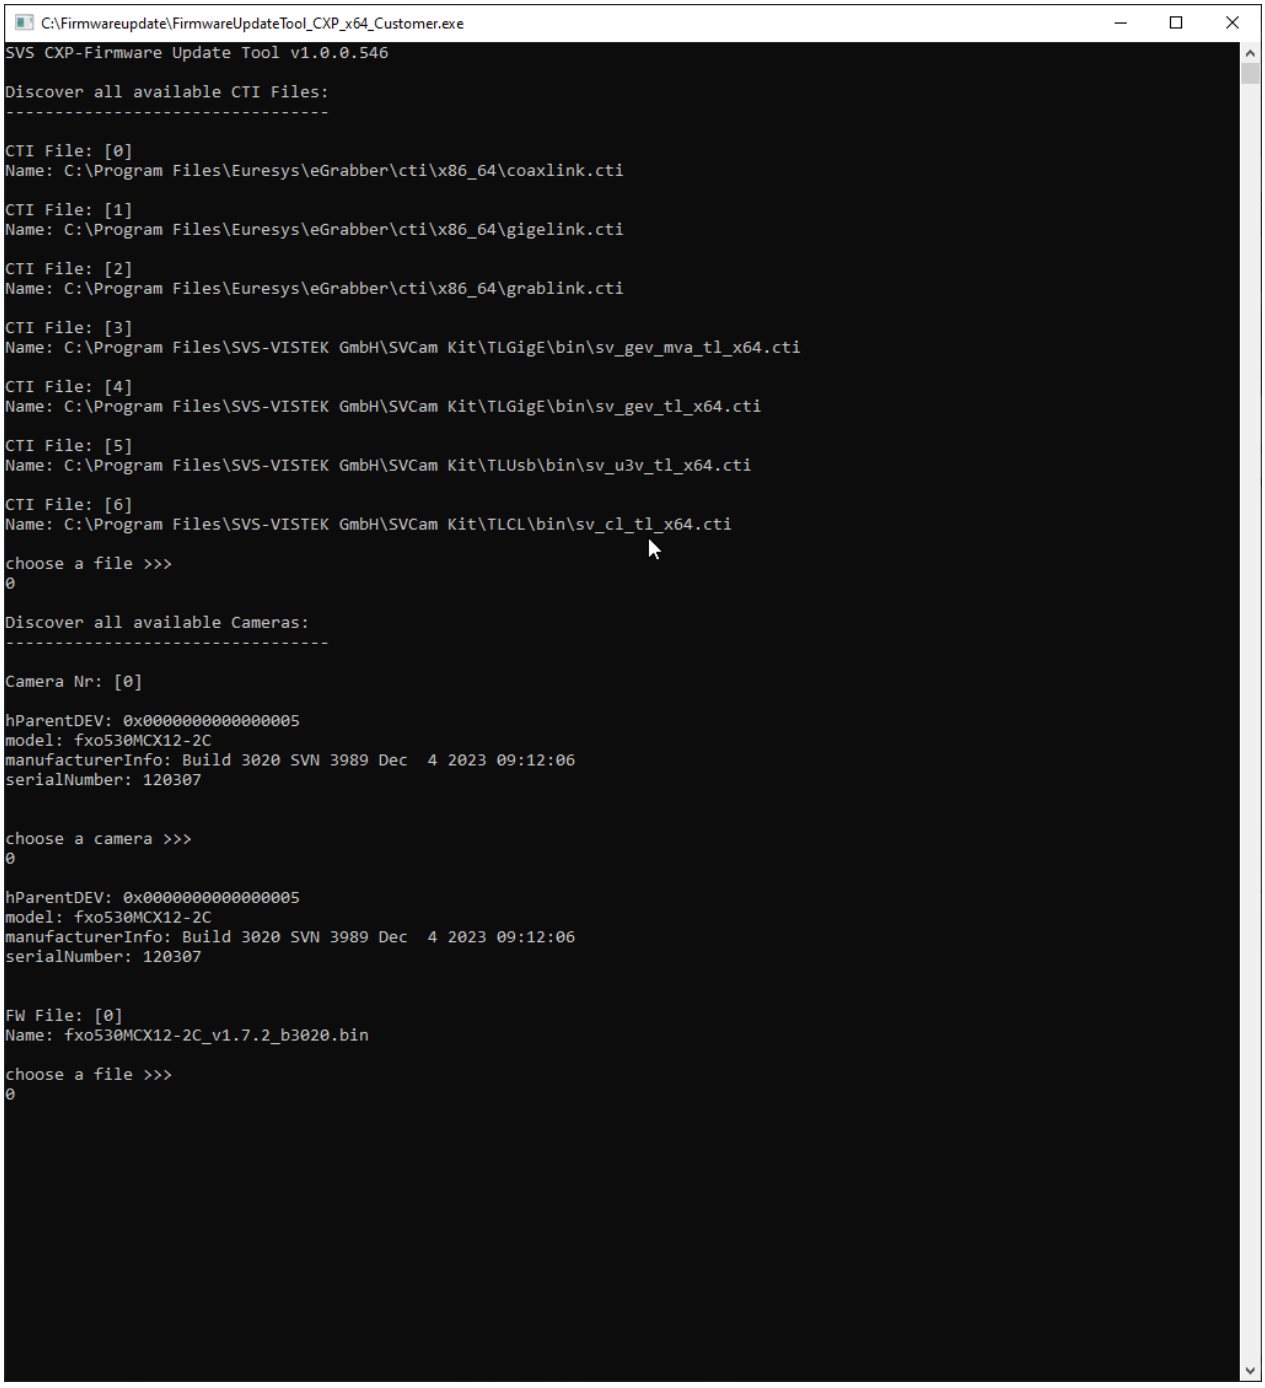





© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany

## 2.4) Wait during the upload process this may take several minutes

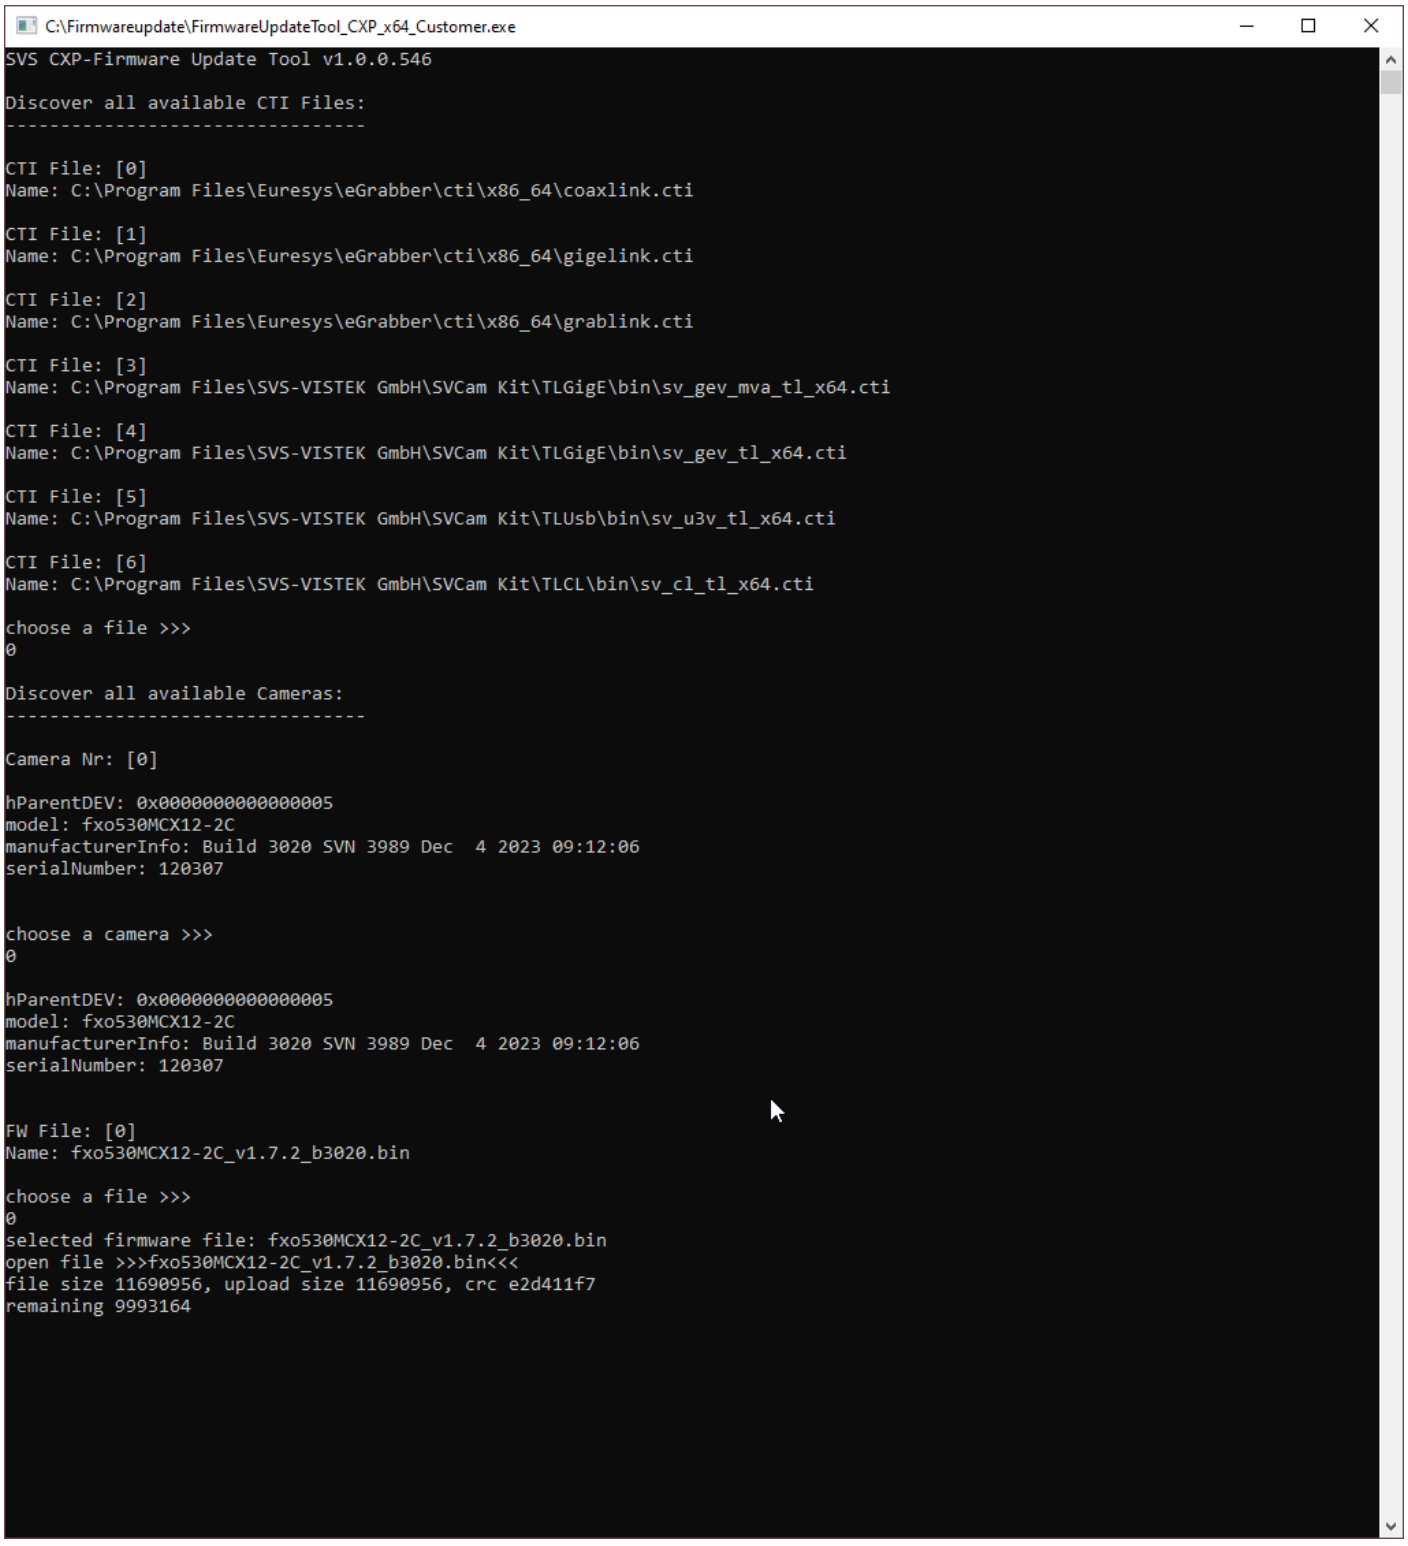





© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany

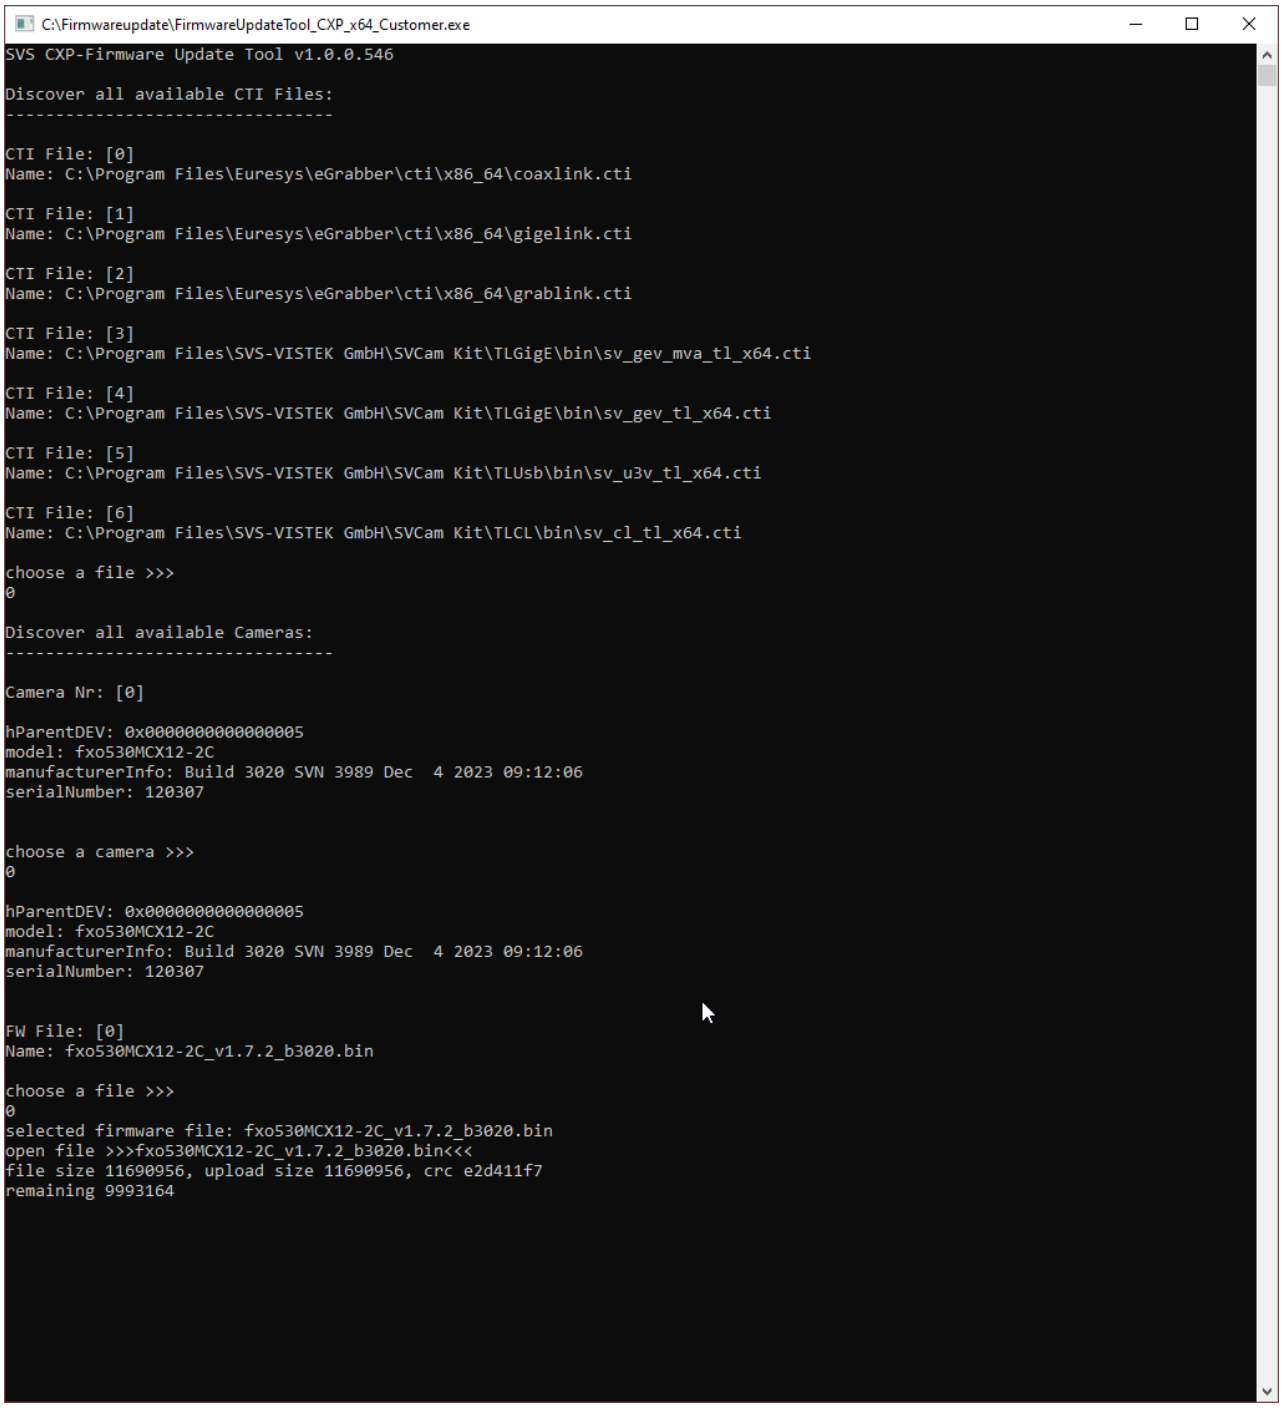





© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany

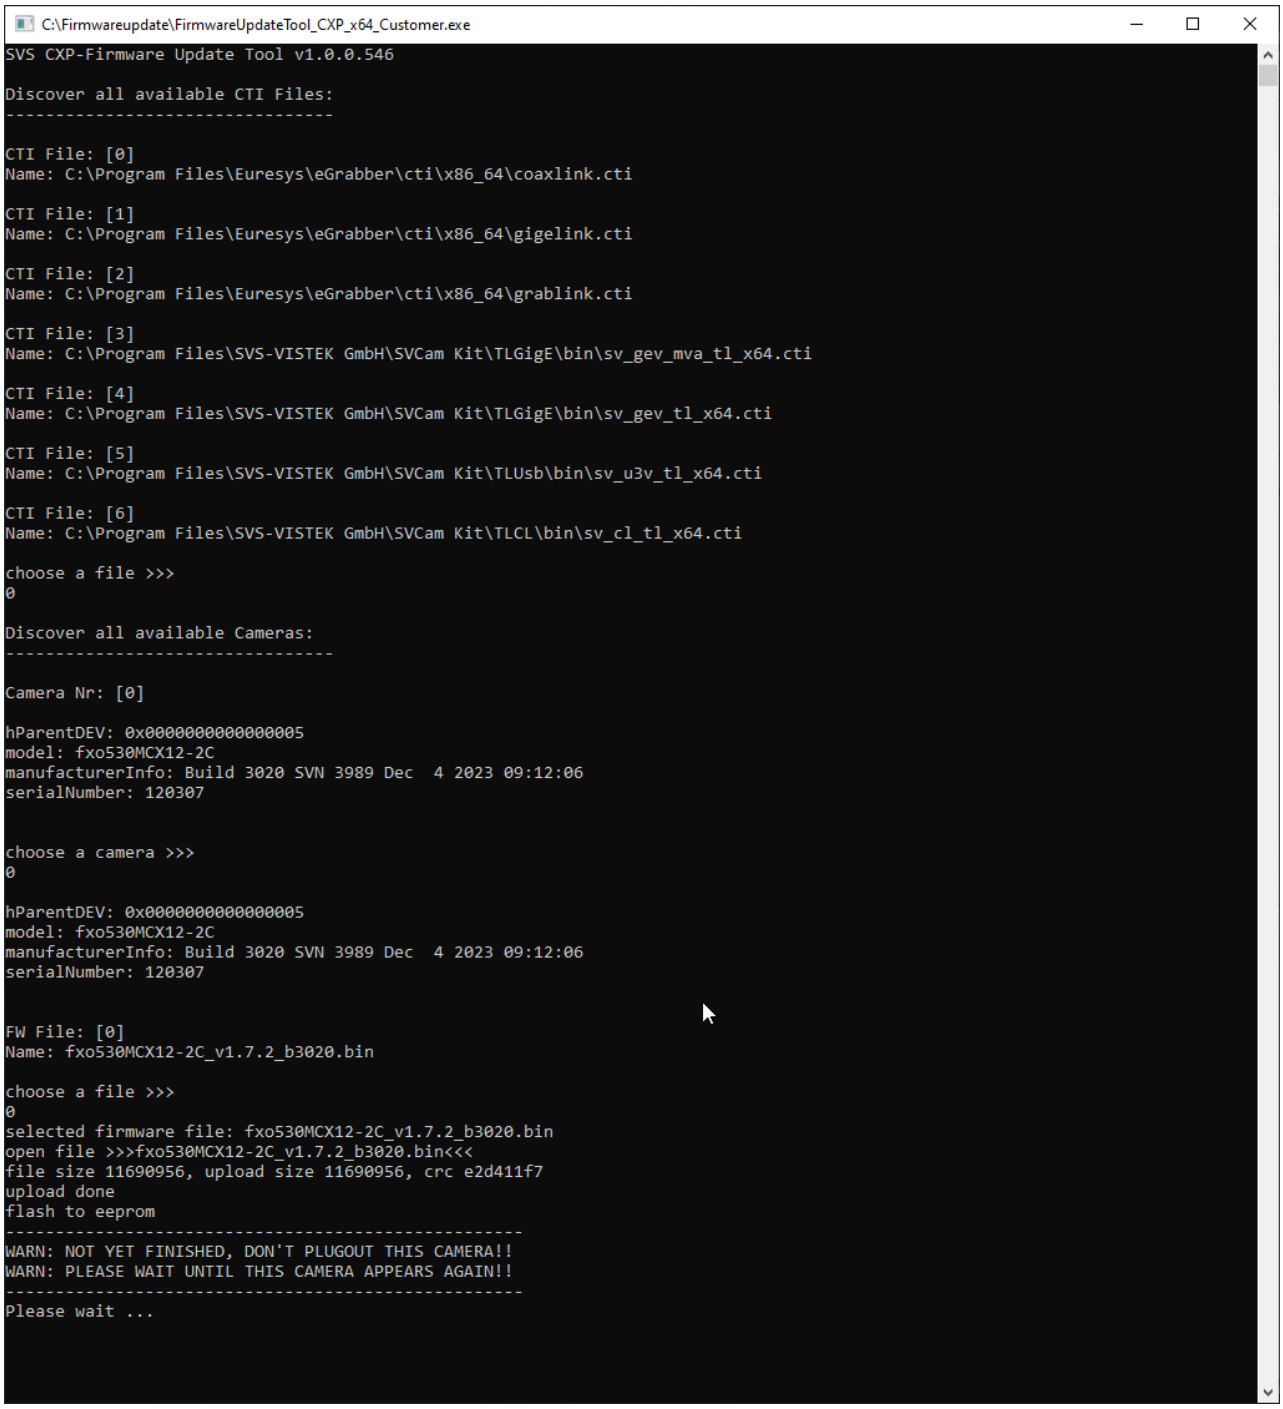




© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany

## 2.5) Only disconnect power cycle when the red framed message occures:

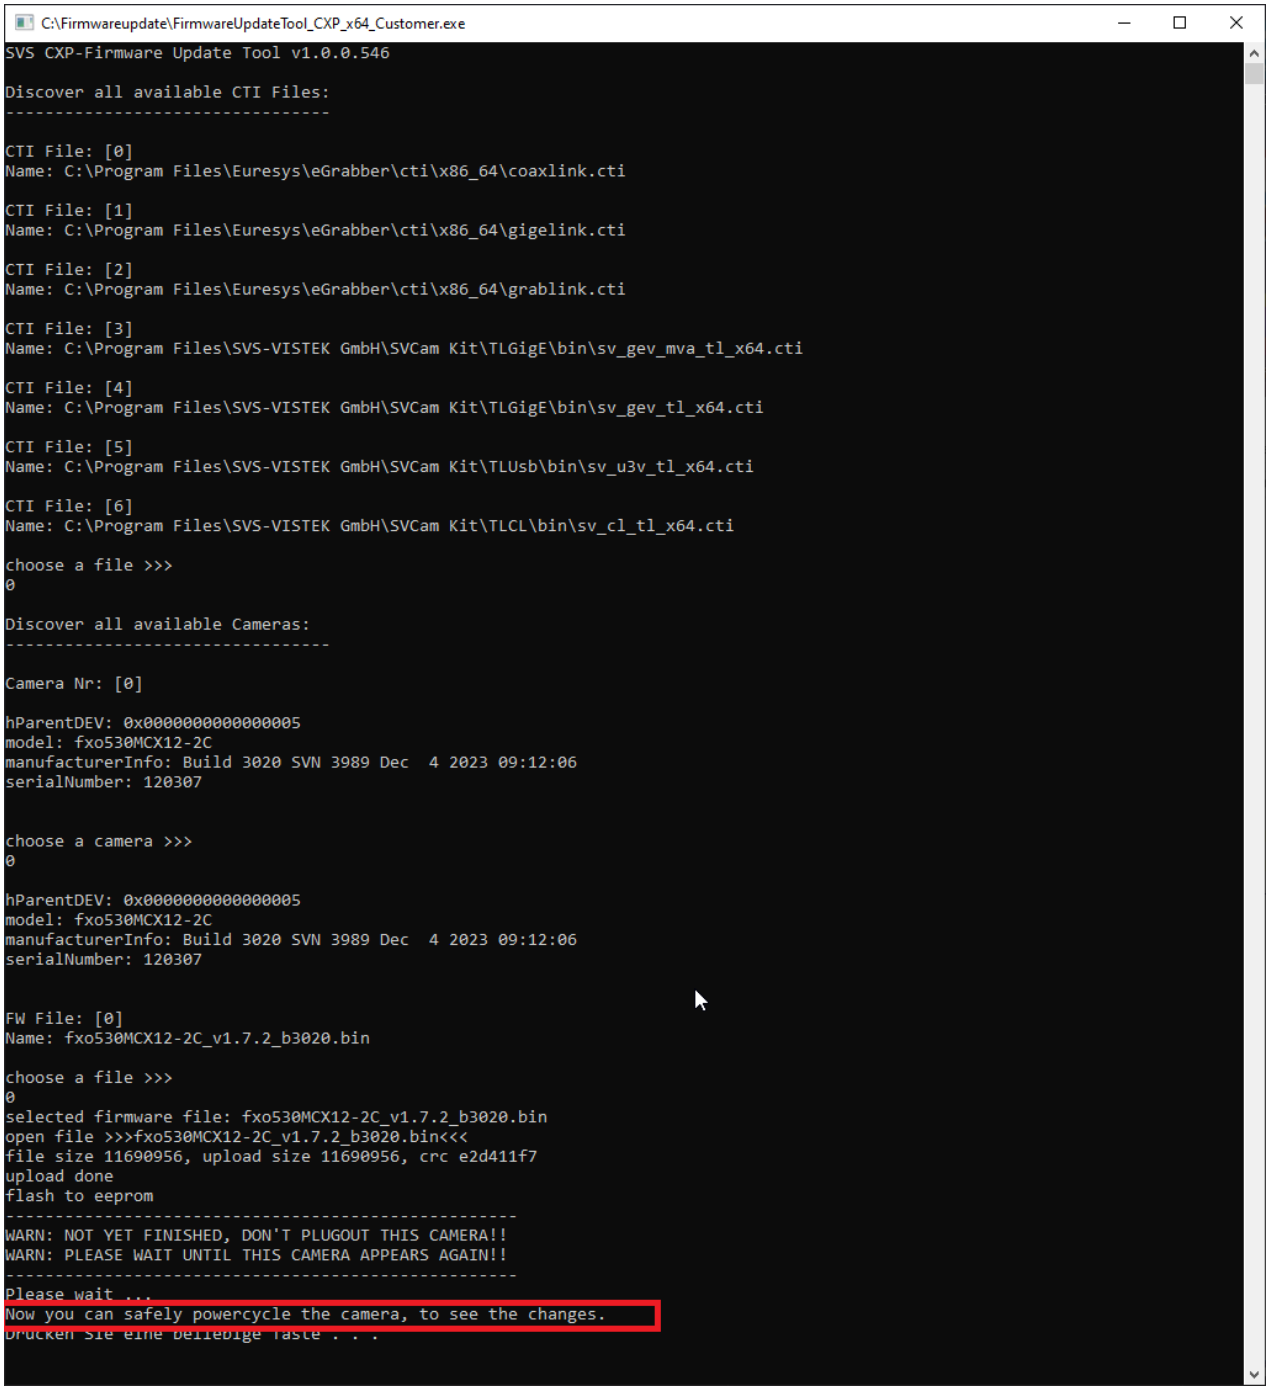




© SVS-VISTEK GmbH, Ferdinand-Porsche-Str. 3, 82205 Gilching / Germany