



FXO 25GigE

fxo425M25GE

General

Model	fxo425M25GE
Product code	F002296
Product series	FXO 25GigE
Status	Available

Sensor

Sensor type	Area scan
Chroma	Mono
Spectrum	Visible
Spectral range	400 nm to 1000 nm
Resolution	1,600 × 1,104 (1.80 MP)
Sensor model	Sony IMX425
Sensor architecture (material)	cmos
Shutter type(s)	Global shutter (GS)
Sensor size	14.4 × 9.94 mm (17.5 mm, Type 1.1)
Pixel size	9.00 µm × 9.00 µm

Pixel formats

Sensor bit depth	8-bit, 12-bit
Monochrome pixel formats	mono8, mono12

Timing and gain

Max. frame rate	671 fps
Exposure time	6 µs to 60 s
Gain	0.0 dB to 48.0 dB

I/Os and power

Non-isolated lines	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
Specific non-isolated lines	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines	1 x Optical isolated input, 0 x Optical isolated input,
I/O connector	12-pin Hirose HR10A-10P-12S
Power supply	10 to 25VDC
Power consumption	External: 17 W (typical)

Operating conditions

Operating temperature (housing)	-10 °C to 60 °C
---------------------------------	-----------------

Mechanical properties

Body dimensions (L x W x H in mm)	100 × 50 × 50
Filter/protection glass	K9 - AR coating - 400-850nm
IP class	IP30
Lens mount(s)	C-Mount
Weight	320 g

On-board memory and FPGA

Image buffer (RAM)	4032 MByte
Non-volatile memory (Flash)	128 MByte

Interfaces

Digital interface	25gige
Interface connector	(SFP28)
Vision standard	GigE Vision 2.0, GigE Vision 3


FW features - image control

Exposure modes	manual, auto, external
Gain modes	auto, manual
Image control features	roi, lut, mirror-image, dpc, shading-correction, ffc


FW features - camera control

Camera control features	PTP, RDMA support, User Sets, PWM(4), Sequencer,
-------------------------	--

Quantum Efficiency

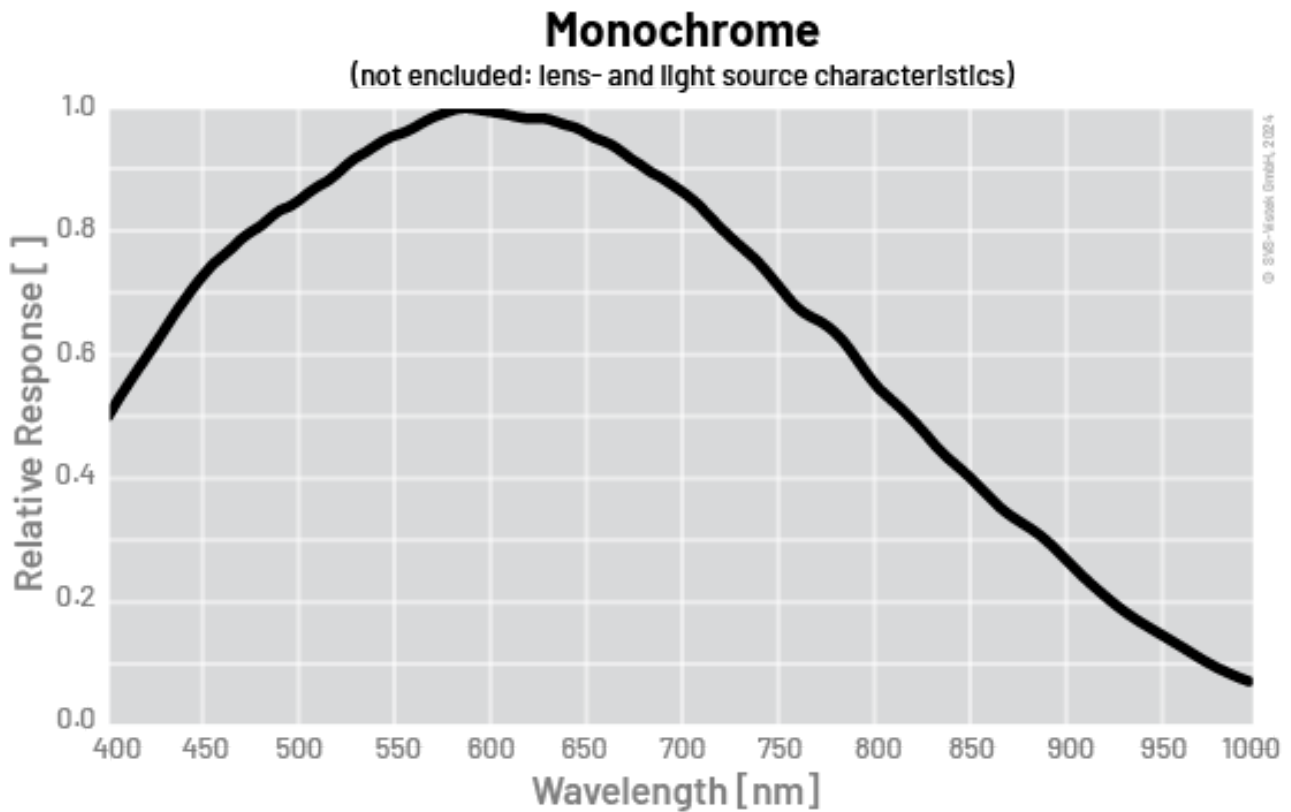

I/O pin assignment

Hirose 12 Pin 	1	VIN -	(GND)	7	OUT 1	(open drain)
	2	VIN +	(10 V to 25 V DC)	8	OUT 2	(open drain)
	3	IN 4	(RXD RS232)	9	IN 3 +	(opto In +)
	4	OUT 4	(TXD RS232)	10	IN 3 -	(opto In -)
	5	IN 1	(0 - 24V)	11	OUT 3	(open drain)
	6	IN 2	(0 - 24V)	12	OUT 0	(open drain)