



## General

Model: hr387CXGE

Product code(s): F004076

Product series: HR 10GigE

Status: Available

## Sensor

Sensor type: Area scan

Chroma: Color

Spectrum: Visible

Spectral range: 400 nm to 1000 nm

Resolution: 5,440 × 3,076 (16.70 MP)

Sensor model: Sony IMX387LQA

Sensor architecture (material): cmos

Shutter type(s): global-shutter

Sensor size: 18.77 × 10.61 mm (21.56 mm, 21.7mm (Type 4/3))

Pixel size: 3.45 µm × 3.45 µm

## Pixel formats

Sensor bit depth: 8-Bit,12-Bit

RGB pixel formats: bayer8, bayer12

## Timing and gain

Max. frame rate:	56.4 fps
Exposure time:	60 µs (max)
Gain:	0.0 dB to 48.0 dB

## I/Os and power

Non-isolated lines:	0 x LVDS input, 0 x LVDS output0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output
Specific non-isolated lines:	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output
Opto-isolated lines:	1 x Optical isolated input, 0 x Optical isolated Input,
Power supply:	10 to 25VDC
Power consumption:	External: 15.5 W (typical at 12 VDC)

## Mechanical properties

Body dimensions (L x W x H in mm):	80 x 70 x 70
Filter/protection glass:	N-BK7 - AR coating
IP class:	IP30
Lens mount(s):	M58x0.75
Weight:	400 g

## On-board memory and FPGA

Image buffer (RAM):	448 MByte
Non-volatile memory (Flash):	32 KByte

## Interfaces

Digital interface:	10gige
Interface connector:	(RJ-45)


## FW features - image control

Exposure modes:	Manual, Auto, External
Gain modes:	Auto, Manual
White balance modes:	auto, manual
Image control features:	FW Features - Image Control

## FW features - camera control


Trigger modes/sync:	INTERNAL,SOFTWARE,EXTERNAL
Camera control features:	User Sets, POE, PWM(4), Sequencer,

## Quantum Efficiency

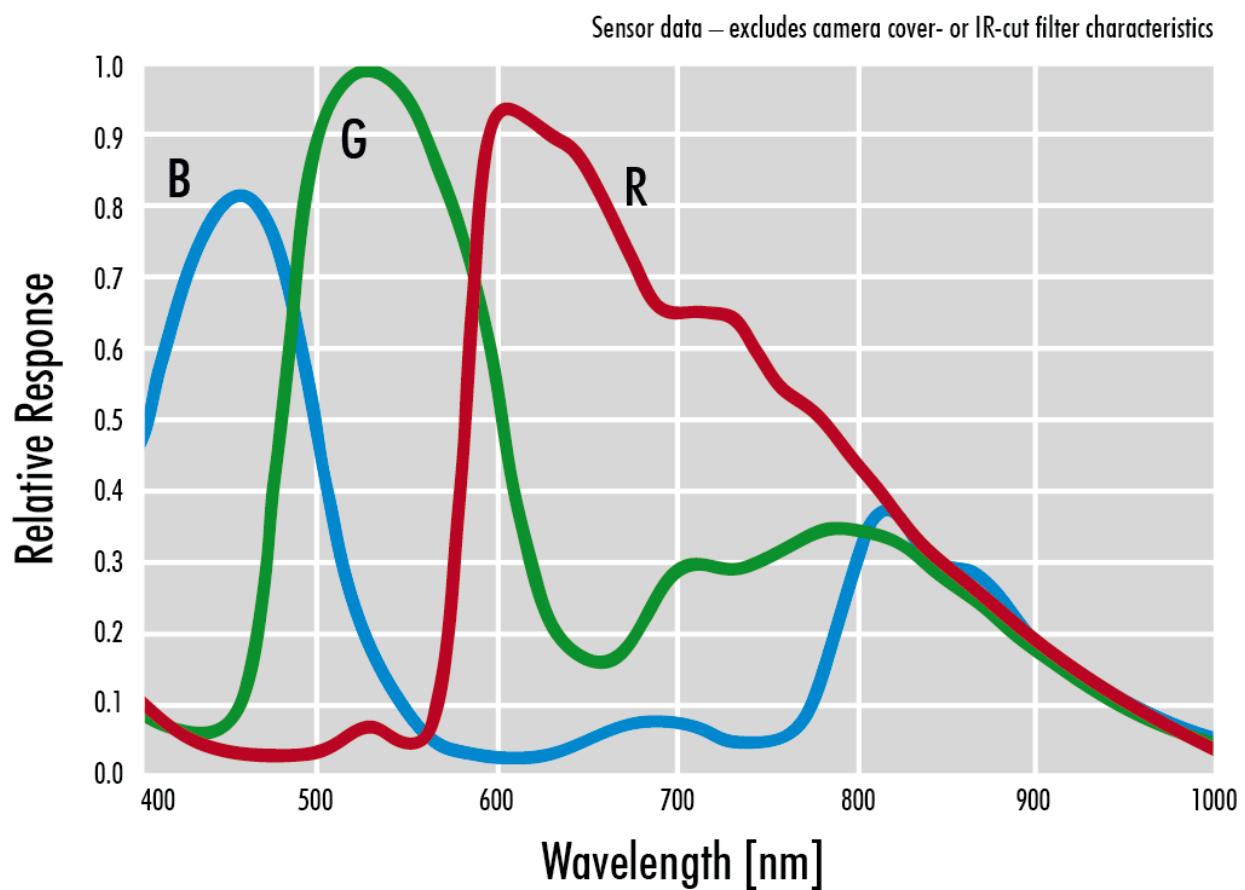


# Technical Drawing


front view

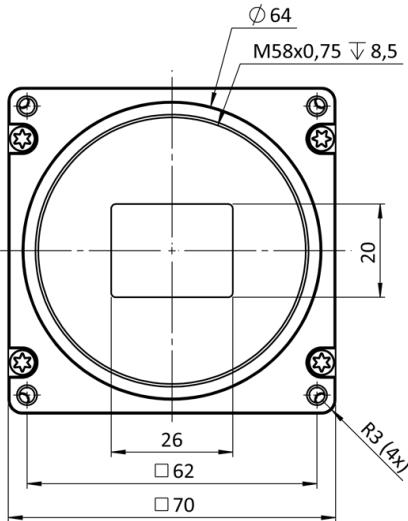


back view

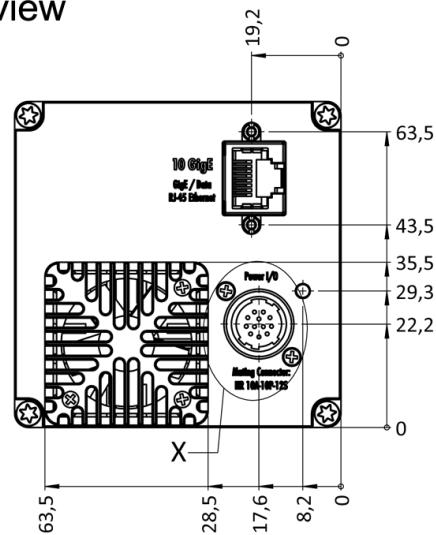


cross section

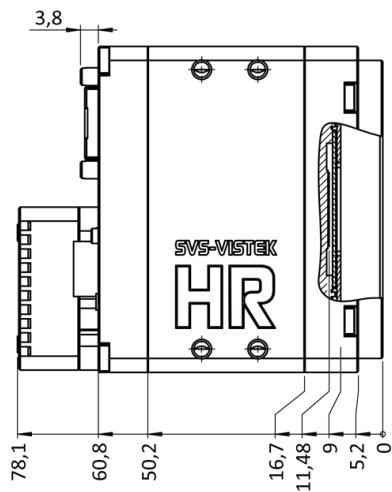


right view

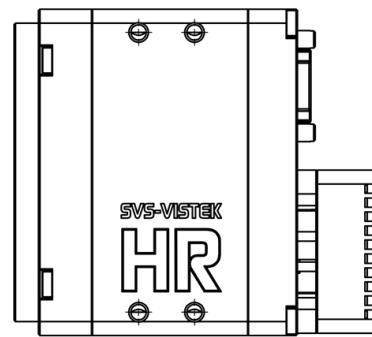


top view

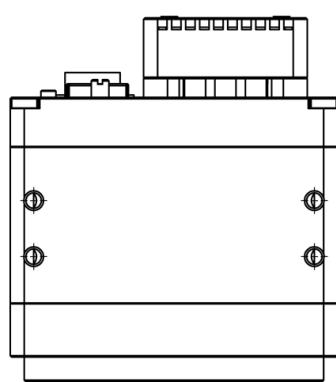

bottom view

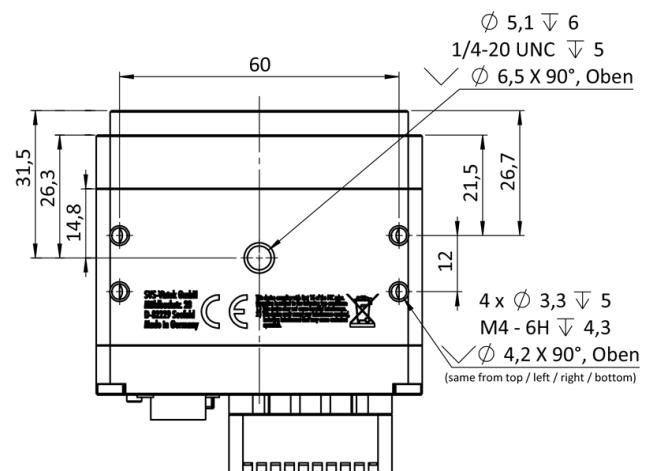

## 3D view

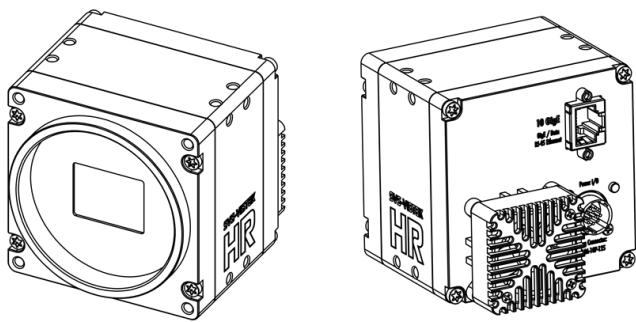

## I/O pin assignment



1	VIN - (GND)	7	OUT1 (open drain)
2	VIN + (10 V to 25 V DC)	8	OUT2 (open drain)
3	IN 4 (RXD RS232)	9	IN 3 + (opto In +)
4	OUT 4 (TXD RS232)	10	IN 3 - (opto In -)
5	IN 1 (0 - 24V)	11	OUT3 (open drain)
6	IN 2 (0 - 24V)	12	OUT0 (open drain)