



General

Model: hr65MXGE-G2

Product code(s): F004147

Product series: HR 10GigE

Status: Coming soon

Sensor

Sensor type: Area scan

Chroma: Mono

Spectrum: Visible

Spectral range: 400 nm to 1000 nm

Resolution: 9,344 × 7,000 (65.00 MP)

Sensor model: Gpixel GMAX3265

Sensor architecture (material): cmos

Shutter type(s): global-shutter

Sensor size: 29.90 × 22.40 mm (37.36 mm, 37.4mm (2.3"))

Pixel size: 3.20 µm × 3.20 µm

Pixel formats

Sensor bit depth: 8-Bit,12-Bit

Monochrome pixel formats: mono8, mono12

Imaging performance

Dynamic range: 65.6 dB

SNR: 40 dB

Timing and gain

Max. frame rate: 17.4 fps

Exposure time: 60 µs (max)

Gain: 0.0 dB to 18.0 dB

I/Os and power

Non-isolated lines: 0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output

Specific non-isolated lines: 1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output

Opto-isolated lines: 1 x Optical isolated input, 0 x Optical isolated Input,

Power supply: 10 to 25VDC

Power consumption: External: 15 W (typical at 12 VDC)

Mechanical properties

Body dimensions (L x W x H in mm): 76 x 70 x 70

Filter/protection glass: N-BK7 - AR coating

IP class: IP30

Lens mount(s): M58x0.75

Weight: 420 g

On-board memory and FPGA

Image buffer (RAM): 448 MByte

Non-volatile memory (Flash): 32 KByte

Interfaces

Digital interface: 10gige

Interface connector: (RJ-45)

FW features - image control

Exposure modes: Manual, Auto


Gain modes: Auto, Manual

Image control features: FW Features - Image Control

FW features - camera control


Trigger modes/sync: INTERNAL,SOFTWARE,EXTERNAL

Camera control features: User Sets, POE, PWM(4), Sequencer,

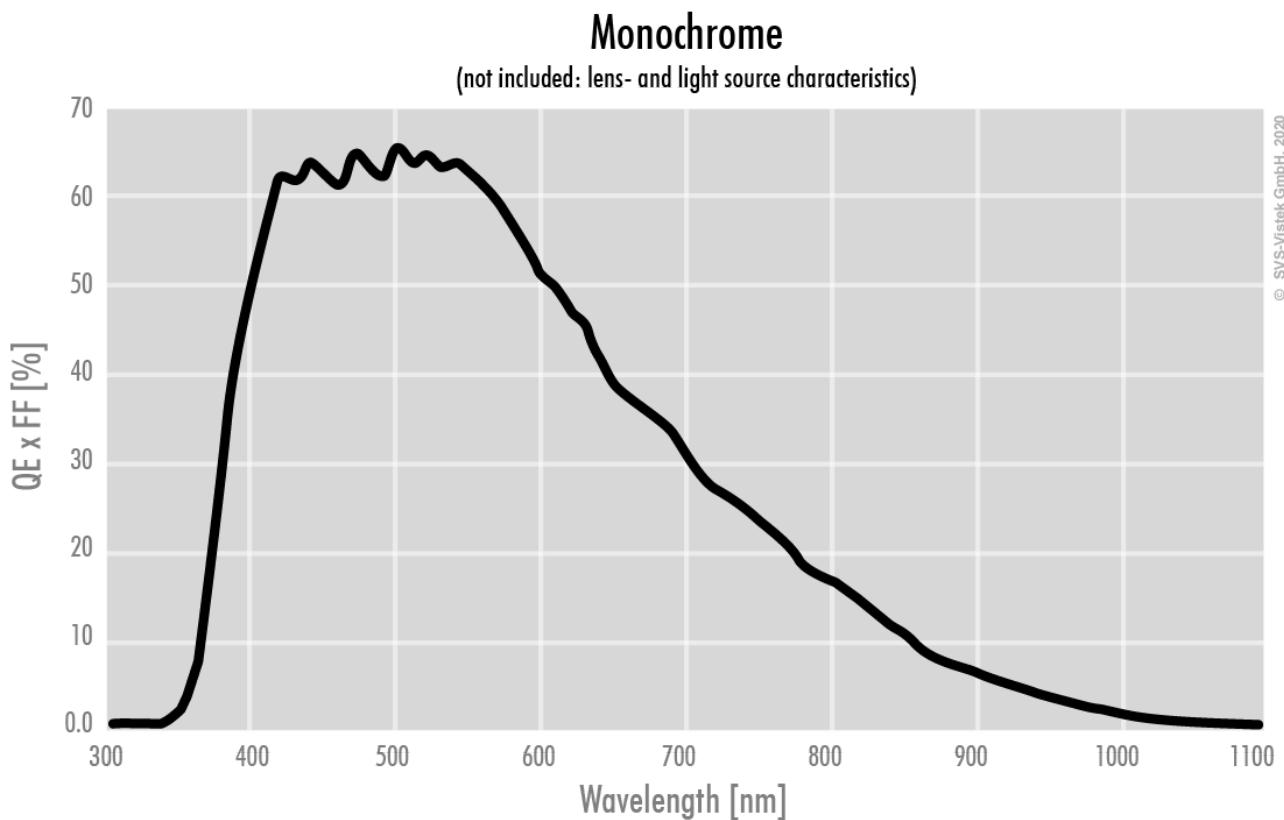


Technical Drawing


front

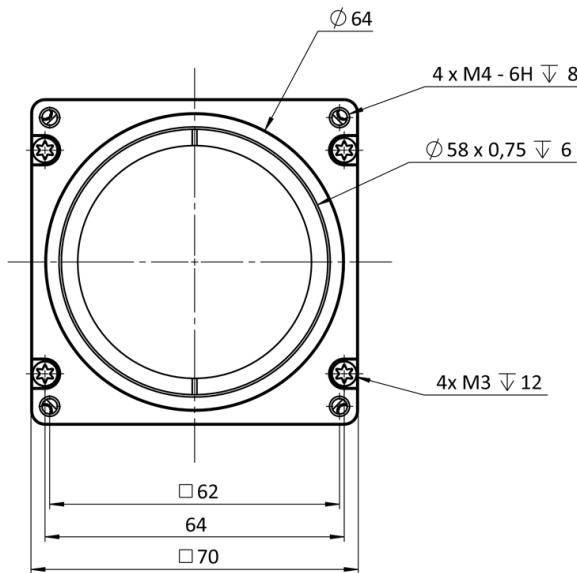


back

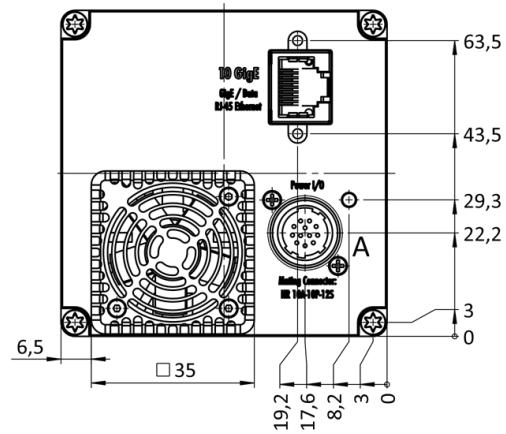


cross section

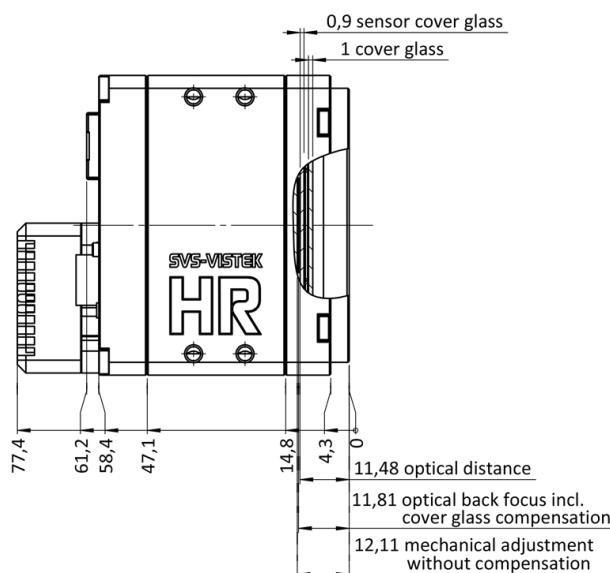


right side

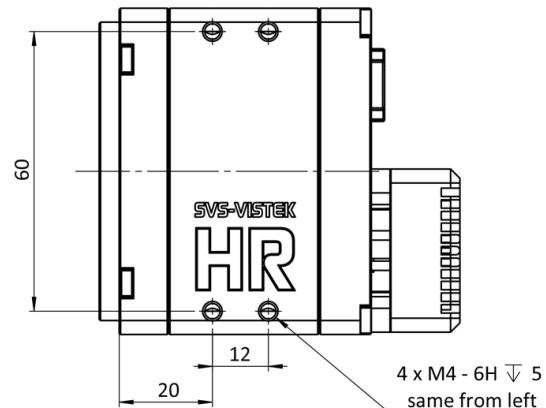


top

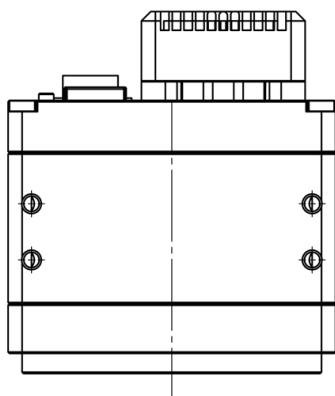


bottom

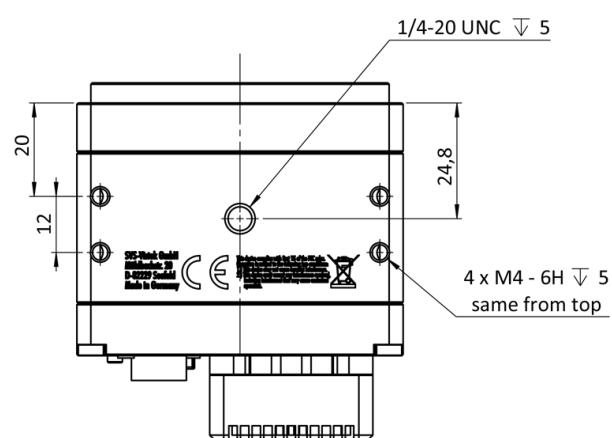

3D

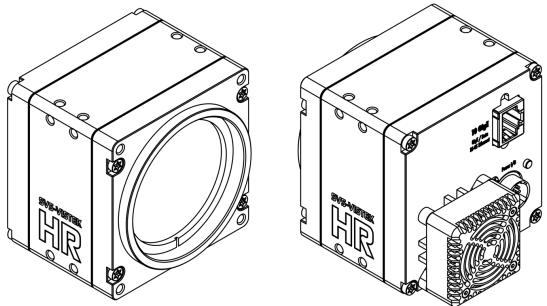

I/O pin assignment



Hirose 12 Pin	1	VIN - (GND)	7	OUT1 (open drain)
	2	VIN + (10 V to 25 V DC)	8	OUT2 (open drain)
	3	IN 4 (RXD RS232)	9	IN 3 + (opto In +)
	4	OUT 4 (TXD RS232)	10	IN 3 - (opto In -)
	5	IN 1 (0-24V)	11	OUT 3 (open drain)
	6	IN 2 (0-24V)	12	OUT0 (open drain)