Allied Vision



SHR CoaXPress

shr461CCX

General

Model	shr461CCX
Product code	F004087
Product series	SHR CoaXPress
Status	Discontinued

Sensor

Sensor type	Area scan
Chroma	Color
Spectrum	Visible
Spectral range	400 nm to 1000 nm
Resolution	11,648 × 8,742 (101.80 MP)
Sensor model	Sony IMX461
Sensor architecture (material)	cmos
Shutter type(s)	Rolling shutter (RS)
Sensor size	43.8 × 32.87 mm (54.76 mm, Type 3.4)
Pixel size	3.76 µm × 3.76 µm

Pixel formats

Sensor bit depth	8-bit, 10-bit, 12-bit, 16-bit
RGB pixel formats	bayer8, bayer10, bayer12, bayer16

Imaging performance

Dynamic range	81.3 dB
SNR	46.8 dB

Allied Vision

Timing and gain

Max. frame rate	8.7 fps
Exposure time	60 µs to 60 s
Gain	0.0 dB to 36.0 dB

I/Os and power

Non-isolated lines	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
Specific non-isolated lines	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines	1 x Optical isolated input, 0 x Optical isolated input,
I/O connector	12-pin Hirose HR10A-10P-12S
Power supply	10 to 25VDC, Power over CoaXPress
Power consumption	External: 14 W (typical)

Operating conditions

Operating temperature (housing)	-10 °C to 70 °C

Mechanical properties

Body dimensions (L x W x H in mm)	83 × 80 × 80
Filter/protection glass	Borofloat B270i - AR coating
IP class	IP30
Lens mount(s)	M72x0.75
Weight	580 g

On-board memory and FPGA

Non-volatile memory (Flash)	160 MByte

Interfaces

Digital interface	cxp-6 with 4 connections
Interface connector	(Din1.0/2.3)
Vision standard	CoaXPress 1.0

FW features - image control

Exposure modes	manual, auto
Gain modes	auto, manual


FW features - image control

White balance modes	auto, manual
Image control features	roi, lut, mirror-image, dpc, shading-correction, ffc

FW features - camera control


Trigger modes/sync	internal, software, external
Camera control features	PoCxP, User Sets, PWM(4), Sequencer,

Quantum Efficiency

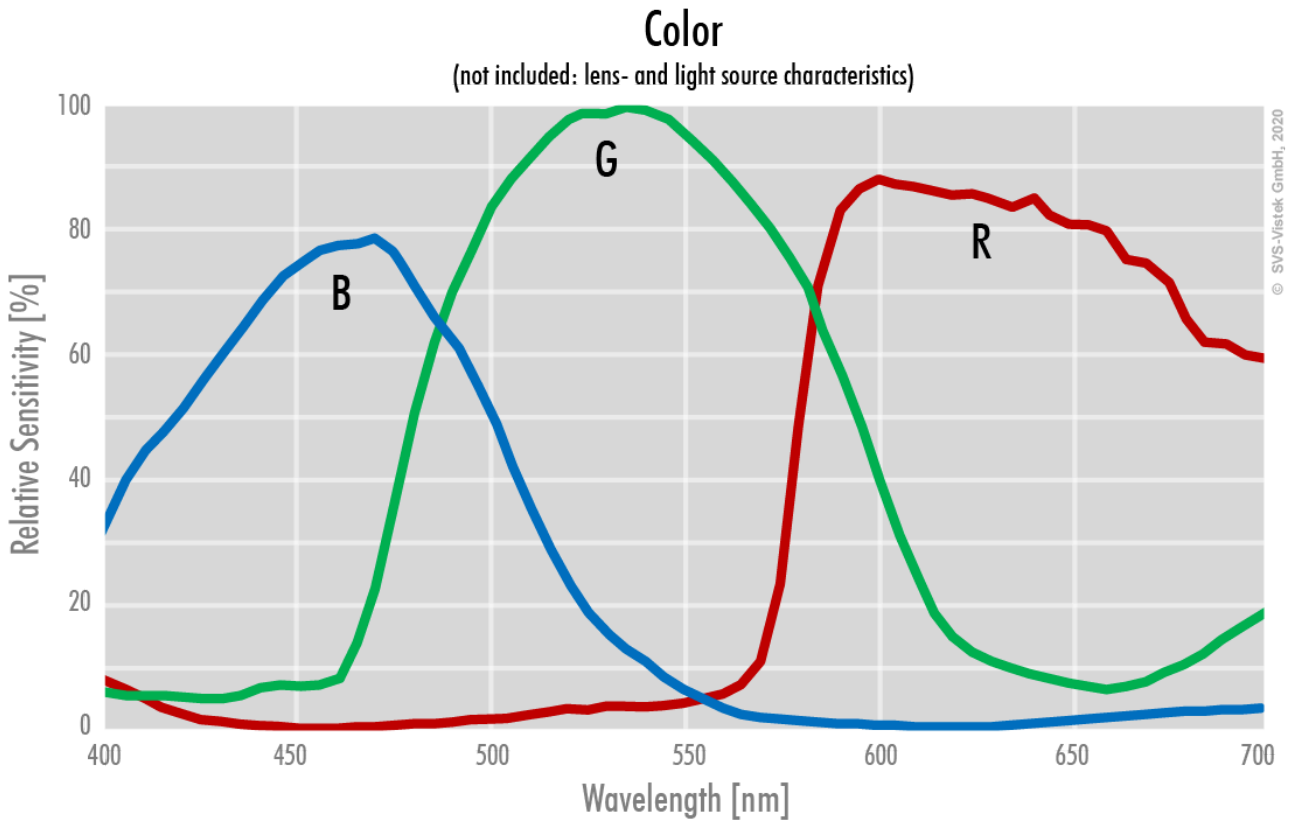


Technical Drawing


front

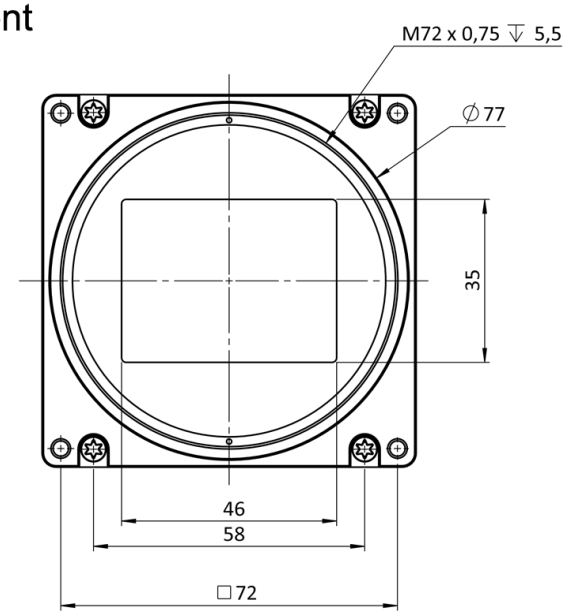


back

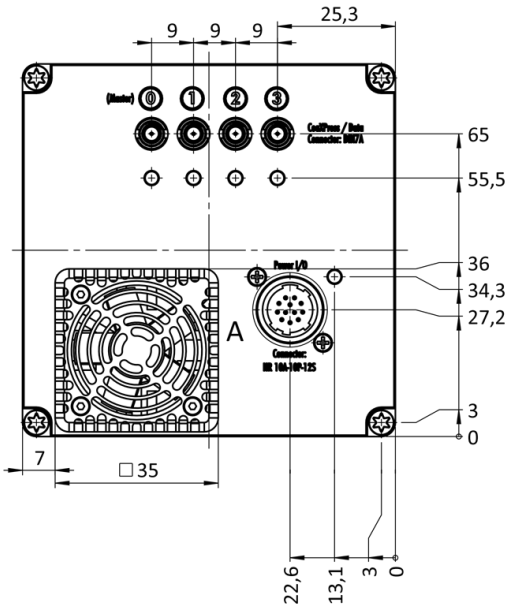


cross section

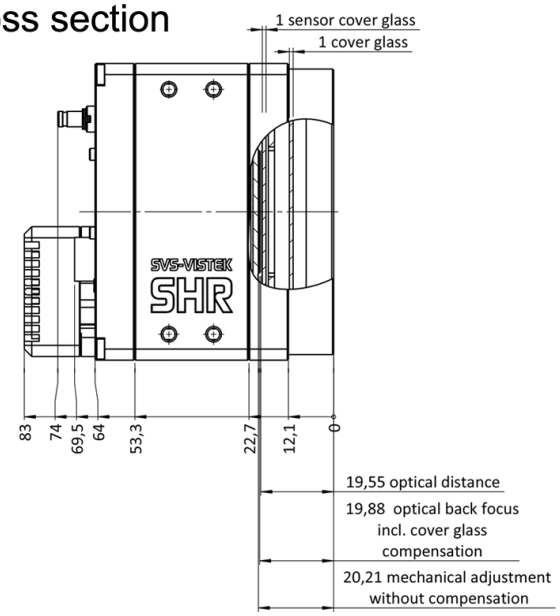


right side

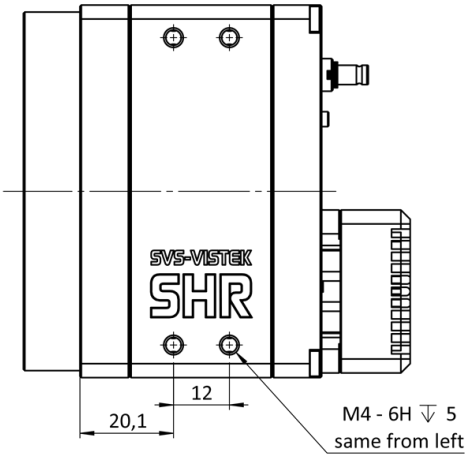


top

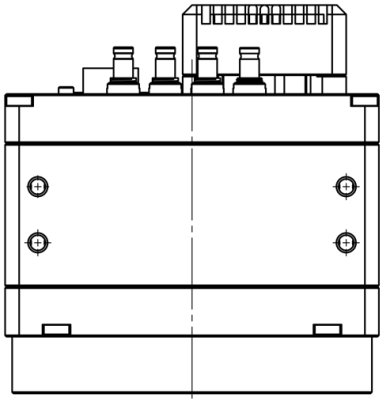

bottom

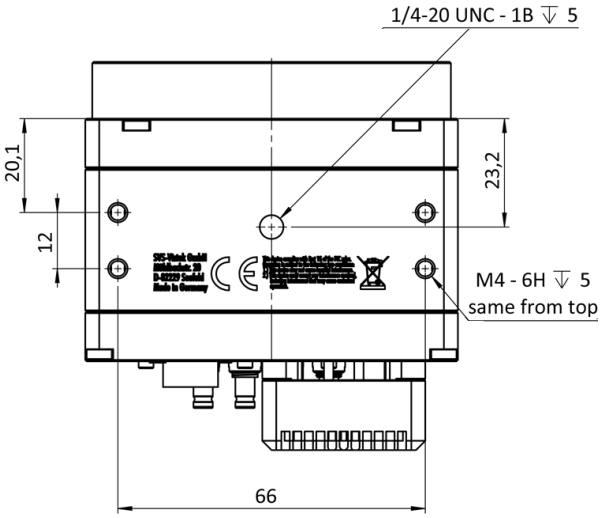


3D

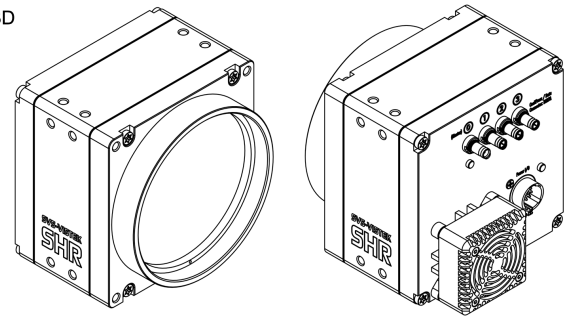

I/O pin assignment

Hirose 12 Pin



1	VIN –	(GND)	7	OUT 1	(open drain)
2	VIN +	(10 V to 25 V DC)	8	OUT 2	(open drain)
3	IN 4	(RXD RS232)	9	IN 3 +	(opto In +)
4	OUT 4	(TXD RS232)	10	IN 3 –	(opto In –)
5	IN 1	(0 - 24V)	11	OUT 3	(open drain)
6	IN 2	(0 - 24V)	12	OUT 0	(open drain)