



FXO 25GigE

fxo537C25GE

General

Model	fxo537C25GE
Product code	F002315
Product series	FXO 25GigE
Status	Available

Sensor

Sensor type	Area scan
Chroma	Color
Spectrum	Visible
Spectral range	400 nm to 1000 nm
Resolution	2,448 × 2,048 (5.00 MP)
Sensor model	Sony IMX537
Sensor architecture (material)	cmos
Shutter type(s)	Global shutter (GS)
Sensor size	6.71 × 5.61 mm (8.75 mm, Type 1/1.8)
Pixel size	2.74 µm × 2.74 µm

Pixel formats

Sensor bit depth	8-bit, 12-bit
RGB pixel formats	bayer8, bayer12

Imaging performance

Dynamic range	72 dB
SNR	39 dB

Timing and gain

Max. frame rate	262 fps
Exposure time	4 μ s to 60 s
Gain	0.0 dB to 48.0 dB

I/Os and power

Non-isolated lines	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
Specific non-isolated lines	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines	1 x Optical isolated input, 0 x Optical isolated input,
I/O connector	12-pin Hirose HR10A-10P-12S
Power supply	10 to 25VDC
Power consumption	External: 17.5 W (typical)

Operating conditions

Operating temperature (housing)	-10 °C to 60 °C
---------------------------------	-----------------

Mechanical properties

Body dimensions (L x W x H in mm)	100 × 50 × 50
Filter/protection glass	IR-Cut 680
IP class	IP30
Lens mount(s)	C-Mount
Weight	320 g

On-board memory and FPGA

Image buffer (RAM)	4032 MByte
Non-volatile memory (Flash)	128 MByte

Interfaces

Digital interface	25gige
Interface connector	(SFP28)
Vision standard	GigE Vision 2.0, 3.0

FW features - image control

Exposure modes	manual, auto, external
----------------	------------------------

FW features - image control

Gain modes	auto, manual
------------	--------------


White balance modes	auto, manual
---------------------	--------------

Image control features	roi, lut, color-transformation, mirror-image
------------------------	--


FW features - camera control

Camera control features	PTP, RDMA support, User Sets, PWM(4), Sequencer,
-------------------------	--

Quantum Efficiency

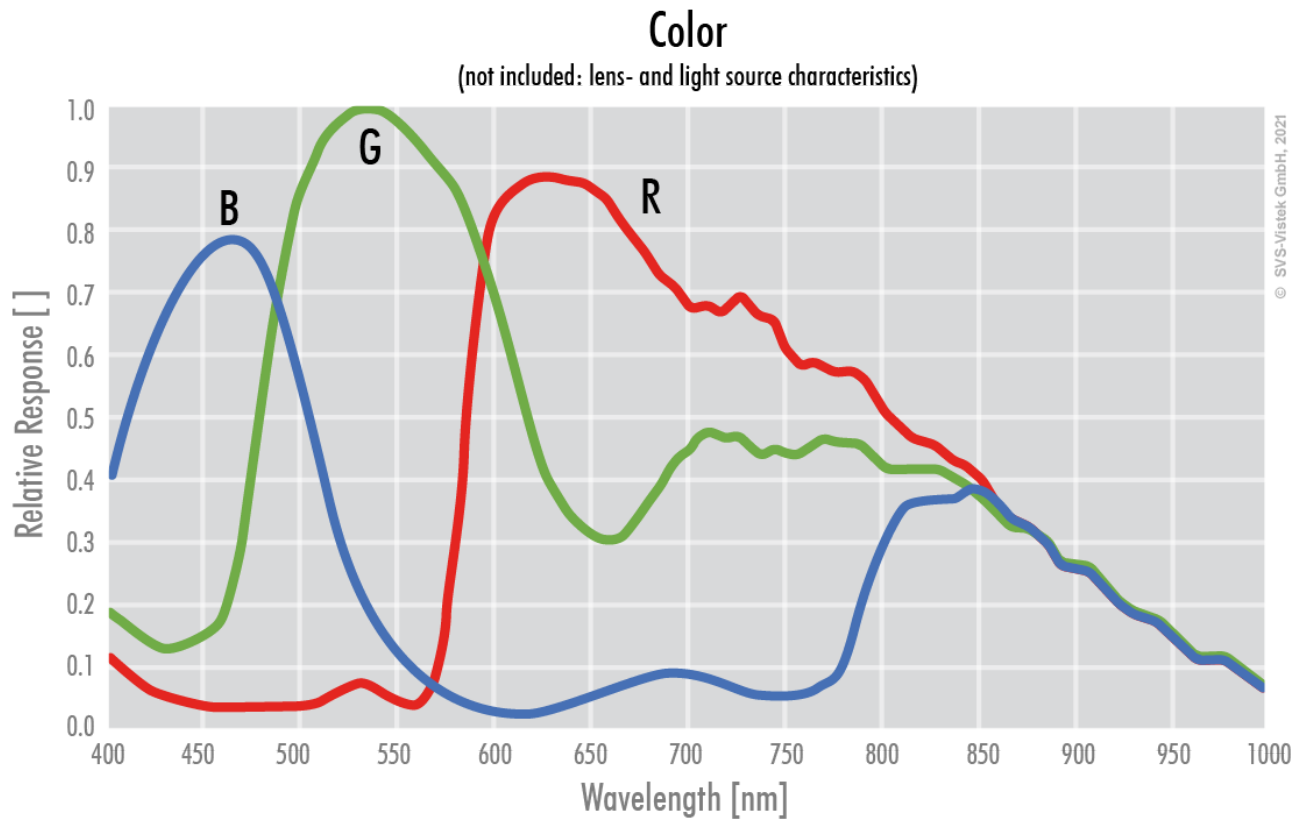

I/O pin assignment

Hirose 12 Pin 	1	VIN -	(GND)	7	OUT 1	(open drain)
	2	VIN +	(10 V to 25 V DC)	8	OUT 2	(open drain)
	3	IN 4	(RXD RS232)	9	IN 3 +	(opto In +)
	4	OUT 4	(TXD RS232)	10	IN 3 -	(opto In -)
	5	IN 1	(0 - 24V)	11	OUT 3	(open drain)
	6	IN 2	(0 - 24V)	12	OUT 0	(open drain)